

PURE 2 DOWNLIGHT

Number of heads	1
Mounting	Ceiling recessed
Lamps description	CDM-TC G8.5 Max 70W
Voltage (V)	220/240
Environment	Indoor
Notes	To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description	Protection glass
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	49° Wide Flood

ELECTRICAL

Control gear availability	Separate item
Control gear mounting	Remote
Emergency	Without
Insulation class	Class I

PHYSICAL


Cutout diameter (mm)	165
Spot diameter (mm)	113
Construction material	Aluminium
Weight (kg)	1,43





Pure 2 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

● 09.1702.30	White
● 09.1702.02	Grey
● 09.1702.14	Black

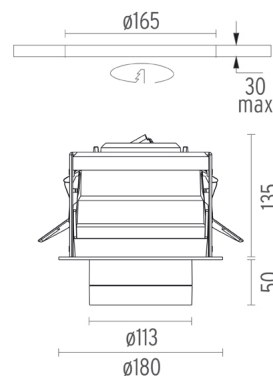

CERTIFICATIONS

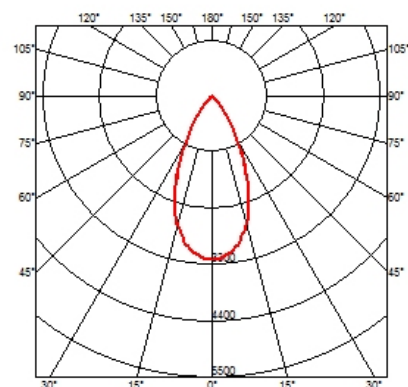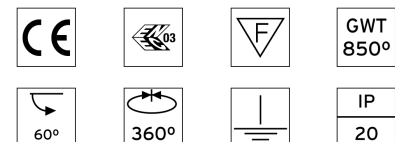

Pure 2 Downlight . Accessories

Optical



08.8167.14

Holding ring


Holding ring



08.8170.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



08.8161.64.OD

Blue filter


Blue filter



Pure 2 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included


- 09.1702.30 White
- 09.1702.02 Grey
- 09.1702.14 Black



08.8161.65.OD

Sky blue filter


Sky blue filter



08.8161.66.OD

Amber filter


Amber filter



08.8161.67.OD

Red filter

Red filter

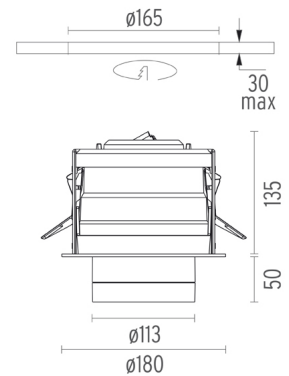

08.8161.98.OD

U.V. filter


U.V. filter



08.8161.68

I.R. filter

I.R. filter





08.8161.CL


Cold light filter

Cold light filter

CERTIFICATIONS

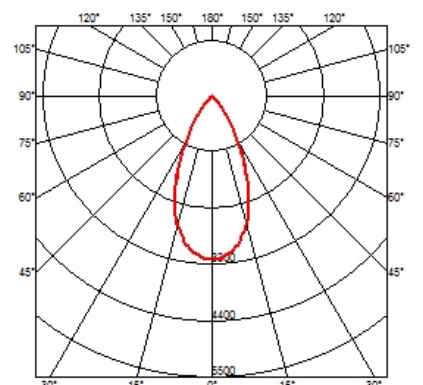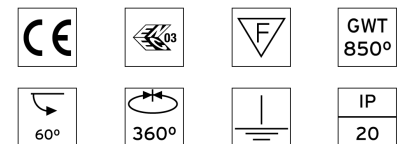

Pure 2 Downlight . Accessories



08.8161.DL

Daylight filter

Daylight filter



08.8161.ND

Neodymium

Neodymium



08.8164.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



Pure 2 Downlight designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

- 09.1702.30 White
- 09.1702.02 Grey
- 09.1702.14 Black



08.8161.69

Hot Light

Hot Light



08.8176.68

Flood lens

Flood lens made in press glass.




● 08.8233.30

● 08.8233.02

● 08.8233.14

Pure 2 Pro external ring accessory

Pure 2 Pro external ring accessory.

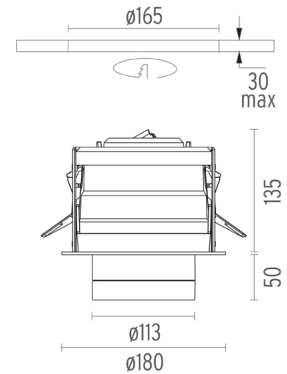

● 08.8234.30



● 08.8234.02

● 08.8234.14

Pure Downlight 2 Wall-Washer external ring accessory


Pure Downlight 2 Wall-Washer external ring accessory.

CERTIFICATIONS

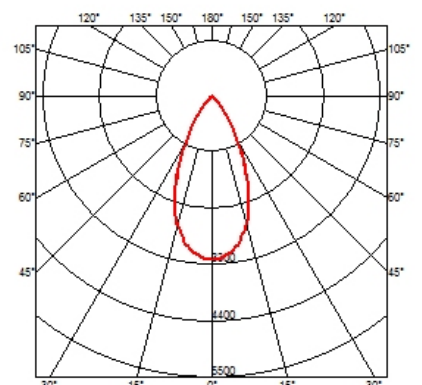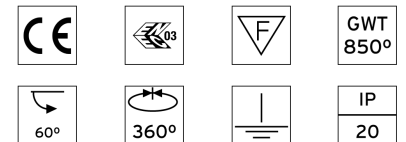

Pure 2 Downlight . Accessories

Mounting



Pure 2 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

08.8153.00

HOW TO ORDER

● 08.8150.30

● 08.8150.02

● 08.8150.14

Installation Frame for No Trim

Installation frame for Pure 2 Downlight No Trim.

Installation Frame for Trim

Installation frame for Pure 2 Downlight Trim.

● 09.1702.30	White
● 09.1702.02	Grey
● 09.1702.14	Black

Pure 2 Downlight . Lamps



60.6483

CDM-TC

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
G8.5

Color temperature (K):
3000 °K

Catalog reference:
60.6483

Lamp type:
CDM-TC



60.6484

CDM-TC

Lamp Watt:
70 W

Lamp category:
Metal halide

Socket:
G8.5

Color temperature (K):
3000 °K

Catalog reference:
60.6484

Lamp type:
CDM-TC



60.6127

CDM-TC

Lamp Watt:
20 W


Lamp category:
Metal halide

Socket:
G8.5

Color temperature (K):
3000 °K

Catalog reference:
60.6127

Lamp type:
CDM-TC

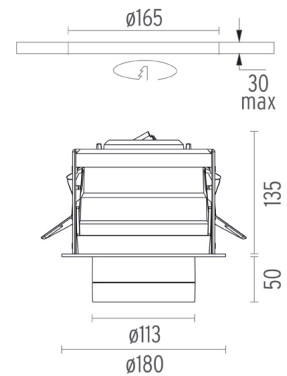

CERTIFICATIONS

