

PURE 3 DOWNLIGHT

Number of heads	1
Mounting	Ceiling recessed
Lamps description	HIT-CRI G12 Max 150W
Voltage (V)	220/240
Environment	Indoor
Notes	To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description	Protection glass
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	35° Flood

ELECTRICAL

Control gear availability	Separate item
Control gear mounting	Remote
Emergency	Without
Insulation class	Class I

PHYSICAL


Cutout diameter (mm)	188
Spot diameter (mm)	135
Construction material	Aluminium
Weight (kg)	1,88





Pure 3 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

● 09.1804.30	White
● 09.1804.02	Grey
● 09.1804.14	Black

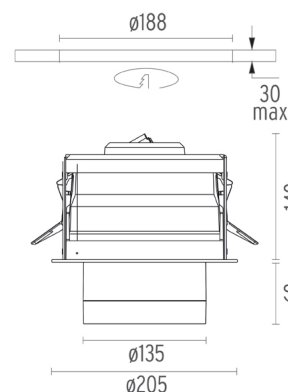

CERTIFICATIONS

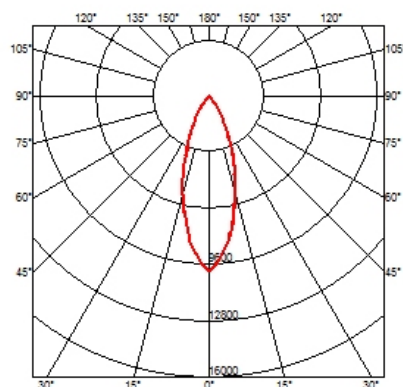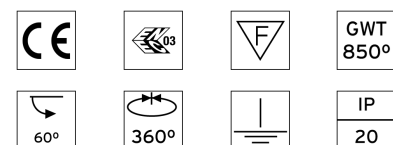

Pure 3 Downlight . Accessories

Optical



08.8168.14

Holding ring

Holding ring



08.8165.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



08.8171.14

Honeycomb



"honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure 3 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included


09.1804.30	White
09.1804.02	Grey
09.1804.14	Black

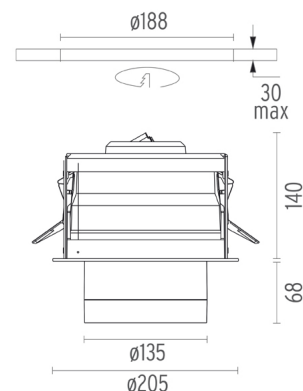

08.8162.64.OD

Blue filter


Blue filter



08.8162.65.OD

Sky blue filter


Sky blue filter



08.8162.66.OD

Amber filter

Amber filter



08.8162.67.OD

Red filter

Red filter



08.8162.98.OD

U.V. filter

U.V. filter





08.8162.68


I.R. filter

I.R. filter

CERTIFICATIONS

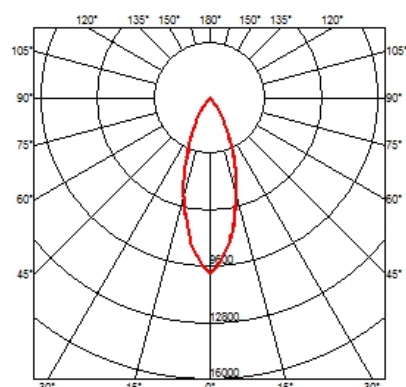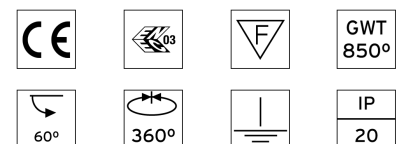


Pure 3 Downlight . Accessories



08.8162.CL

Cold light filter


Cold light filter



08.8162.DL

Daylight filter

Daylight filter



08.8162.ND

Neodimium

Neodimium



Pure 3 Downlight designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included



08.8162.69

Hot Light

Hot Light




08.8177.68


Flood lens

Flood lens made in press glass.

09.1804.30	White
09.1804.02	Grey
09.1804.14	Black

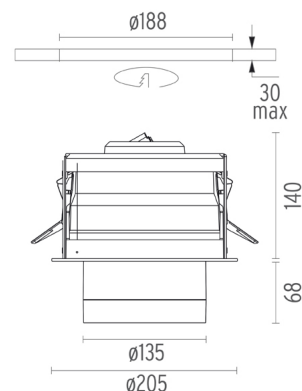

CERTIFICATIONS

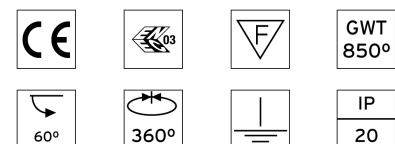


Mounting



08.8154.00

Installation Frame for No Trim

Installation frame for Pure 3
Downlight No Trim.

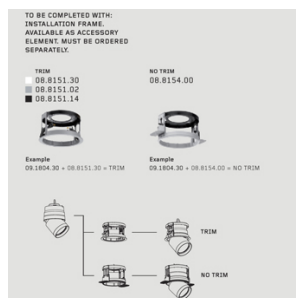

HOW TO ORDER




08.8151.30

08.8151.02

08.8151.14

Installation Frame For Trim

Installation frame for Pure 3
Downlight Trim.

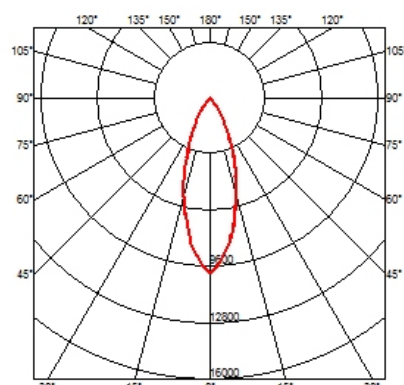

Pure 3 Downlight . Lamps



60.6481

HIT-CRI

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
G12

Color temperature (K):
3000 °K

Catalog reference:
60.6481

Lamp type:
HIT-CRI



60.6482

HIT-CRI

Lamp Watt:
70 W

Lamp category:
Metal halide

Socket:
G12

Color temperature (K):
3000 °K

Catalog reference:
60.6482

Lamp type:
HIT-CRI



60.6140

HIT-CRI

Lamp Watt:
70 W

Lamp category:
Metal halide

Socket:
G12

Color temperature (K):
4200 °K

Catalog reference:
60.6140

Lamp type:
HIT-CRI



60.6141

HIT-CRI

Lamp Watt:
150 W

Lamp category:
Metal halide

Socket:
G12

Color temperature (K):
4200 °K

Catalog reference:
60.6141


Lamp type:
HIT-CRI



Pure 3 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

09.1804.30	White
09.1804.02	Grey
09.1804.14	Black

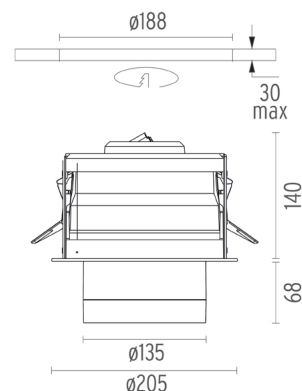

CERTIFICATIONS

