

PURE 3 DOWNLIGHT

Number of heads	1
Mounting	Ceiling recessed
Lamps description	CDM-R III GX8.5 Max 70W
Voltage (V)	220/240
Environment	Indoor
Notes	To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description	Bare lamps
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10° Spot, 24°, 40° Wide Flood

ELECTRICAL

Control gear availability	Separate item
Control gear mounting	Remote
Emergency	Without
Insulation class	Class I

PHYSICAL


Cutout diameter (mm)	188
Spot diameter (mm)	135
Construction material	Aluminium
Weight (kg)	1,88





Pure 3 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

● 09.1805.30	White
● 09.1805.02	Grey
● 09.1805.14	Black

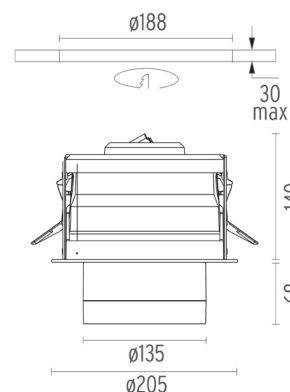

CERTIFICATIONS

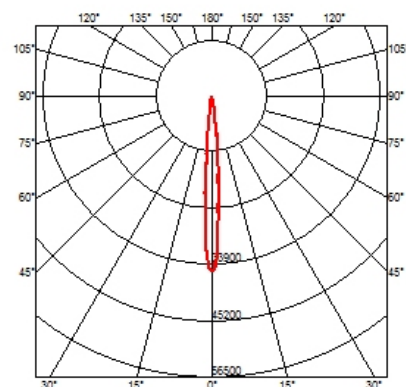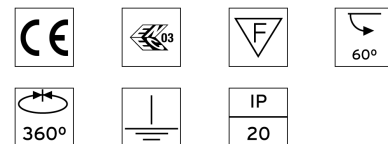

Pure 3 Downlight . Accessories

Optical



08.8168.14

Holding ring

Holding ring



08.8165.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



08.8171.14

Honeycomb



"honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure 3 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included


09.1805.30	White
09.1805.02	Grey
09.1805.14	Black

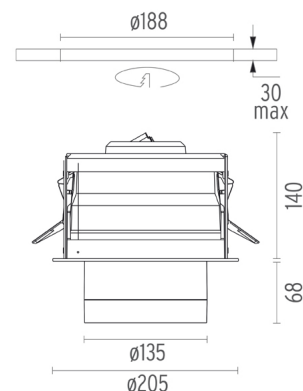

08.8162.64.OD

Blue filter


Blue filter



08.8162.65.OD

Sky blue filter


Sky blue filter



08.8162.66.OD

Amber filter

Amber filter



08.8162.67.OD

Red filter

Red filter



08.8162.98.OD

U.V. filter

U.V. filter





08.8162.68


I.R. filter

I.R. filter

CERTIFICATIONS

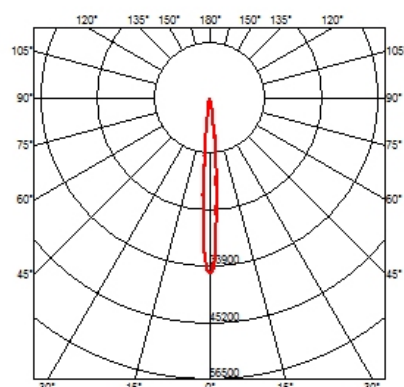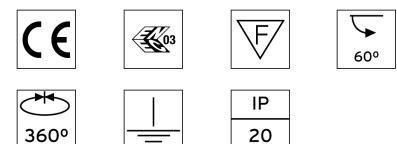


Pure 3 Downlight . Accessories



08.8162.CL

Cold light filter


Cold light filter



08.8162.DL

Daylight filter

Daylight filter



08.8162.ND

Neodimium

Neodimium



Pure 3 Downlight designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

09.1805.30	White
09.1805.02	Grey
09.1805.14	Black



08.8162.69

Hot Light


Hot Light




08.8177.68

Flood lens

Flood lens made in press glass.

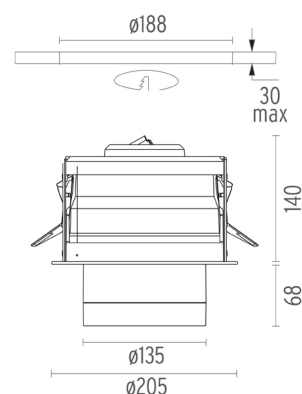

CERTIFICATIONS

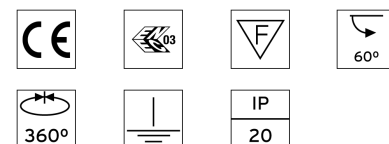


Mounting



08.8154.00

Installation Frame for No Trim

Installation frame for Pure 3
Downlight No Trim.



HOW TO ORDER




08.8151.30

08.8151.02

08.8151.14

Installation Frame For Trim

Installation frame for Pure 3
Downlight Trim.

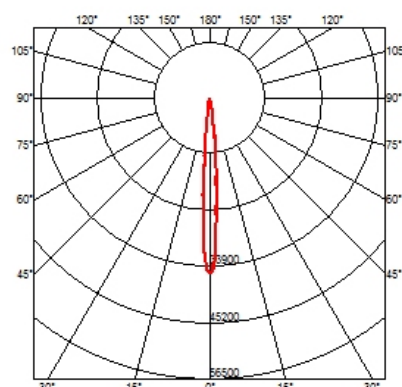

Pure 3 Downlight . Lamps



60.6178

CDM-R111

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
GX8.5

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6178

Lamp type:
CDM-R111



60.6179

CDM-R111

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
GX8.5

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
60.6179

Lamp type:
CDM-R111



60.6180

CDM-R111

Lamp Watt:
70 W

Lamp category:
Metal halide

Socket:
GX8.5

Lamp angle:
24 °

Color temperature (K):
2900 °K

Catalog reference:
60.6180


Lamp type:
CDM-R111



Pure 3 Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

09.1805.30	White
09.1805.02	Grey
09.1805.14	Black

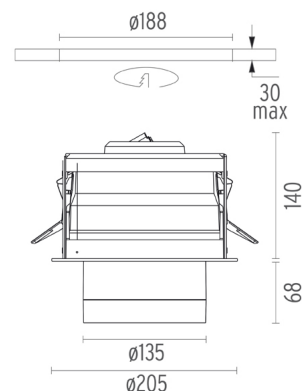

CERTIFICATIONS

