

FLOS

PURE 3 SPOT CEILING

Number of heads	1
Mounting	Ceiling surface
Lamps description	QR-111 G53 Max 100W or LED QR-111 G53
Voltage (V)	220/240
Environment	Indoor
Notes	Please ask Flos architectural sales team about QR-111 lamps LED retrofit compatibility.



OPTICAL

Light controller description	Bare lamps
Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	24°, 25°, 36°, 45°, 6°, 8°

Pure 3 Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240 V - 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer


ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class I



● 09.1968.30	White
● 09.1968.02	Grey
● 09.1968.14	Black

PHYSICAL

Width (mm)	249
Spot diameter (mm)	135
Construction material	Aluminium
Weight (kg)	2,30

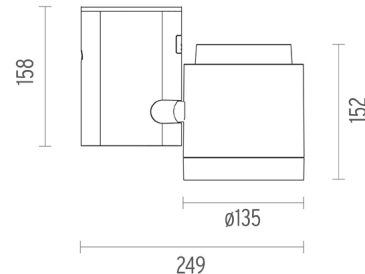

CERTIFICATIONS

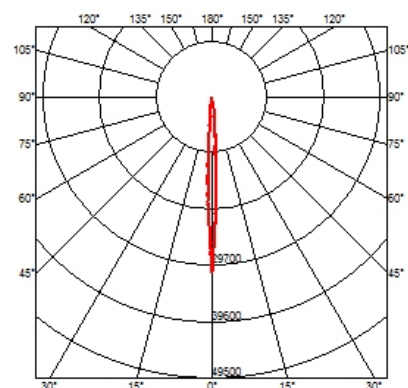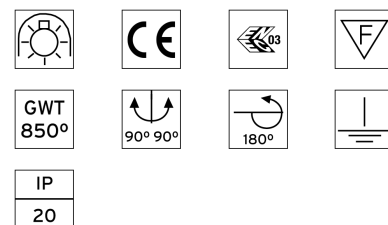

Pure 3 Spot Ceiling . Accessories

Optical



08.8168.14

Holding ring

Holding ring



08.8165.68

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



08.8171.14

Honeycomb


"honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure 3 Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240 V - 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer


09.1968.30	White
09.1968.02	Grey
09.1968.14	Black



08.8162.64.OD

Blue filter


Blue filter



08.8162.65.OD

Sky blue filter



Sky blue filter



08.8162.66.OD

Amber filter

Amber filter

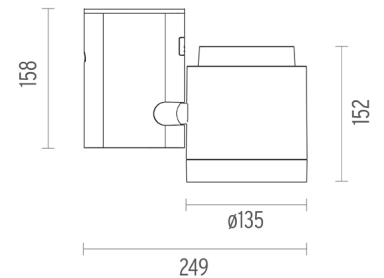

08.8162.67.OD

Red filter

Red filter



08.8162.98.OD

U.V. filter

U.V. filter




08.8162.68


I.R. filter

I.R. filter

CERTIFICATIONS

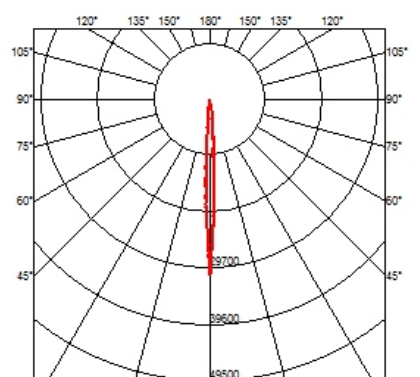


Pure 3 Spot Ceiling . Accessories



08.8162.CL

Cold light filter


Cold light filter



08.8162.DL

Daylight filter

Daylight filter



08.8162.ND

Neodimium

Neodimium



Pure 3 Spot Ceiling

designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240 V - 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer

- 09.1968.30 White
- 09.1968.02 Grey
- 09.1968.14 Black



08.8162.69

Hot Light

Hot Light



08.8177.68

Flood lens


Flood lens made in press glass.




- 08.8236.30
- 08.8236.02
- 08.8236.14

External ring Pure 3

Pure 3 Pro external ring accessory.

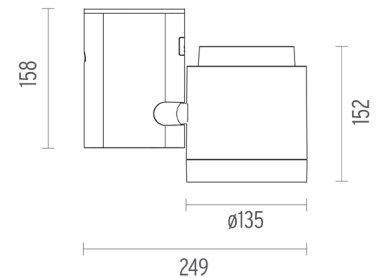

CERTIFICATIONS

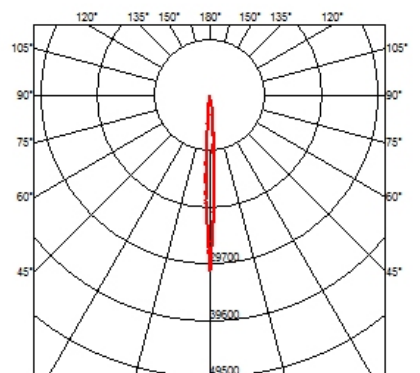

Pure 3 Spot Ceiling . Lamps



60.6398

QR-III

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6398

Lamp type:
QR-III



60.6374

QR-III

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6374

Lamp type:
QR-III



60.6375

QR-III

Lamp Watt:
75 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
8 °

Color temperature (K):
3000 °K

Catalog reference:
60.6375


Lamp type:
QR-III



Pure 3 Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240 V - 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer

● 09.1968.30	White
● 09.1968.02	Grey
● 09.1968.14	Black

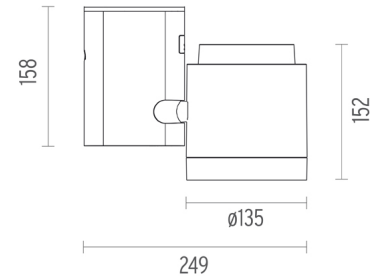

60.6376

QR-III

Lamp Watt:
75 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6376

Lamp type:
QR-III



60.6862

QR-III

Lamp Watt:
30 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
8 °

Color temperature (K):
3000 °K

Catalog reference:
60.6862

Lamp type:
QR-III



60.6861

QR-III

Lamp Watt:
45 W

Lamp category:
Halogen low voltage

Socket:
G53



Lamp angle:
45 °

Color temperature (K):
3000 °K

Catalog reference:
60.6861

Lamp type:
QR-III

CERTIFICATIONS

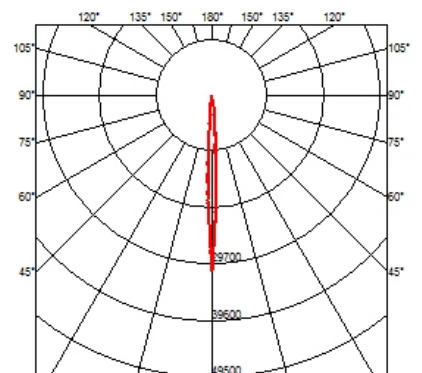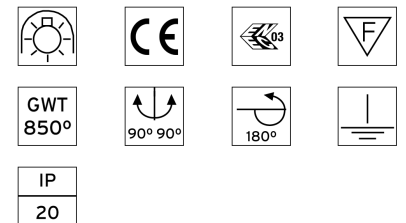

FLOS

Pure 3 Spot Ceiling . Lamps



60.6863

QR-III

Lamp Watt:
60 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
8 °

Color temperature (K):
3000 °K

Catalog reference:
60.6863

Lamp type:
QR-III

60.6864

QR-III

Lamp Watt:
60 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6864

Lamp type:
QR-III

60.6962

LED QR-III

Lamp Watt:
12 W

Lamp category:
LED

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
2800 °K


Catalog reference:
60.6962

Lamp type:
LED QR-III

Pure 3 Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/
wall. Electronic transformer
integrated 220/240 V - 12V, 50/60Hz.
Dimmable from 10% to 100% of full
output using built-in potentiometer

● 09.1968.30	White
● 09.1968.02	Grey
● 09.1968.14	Black

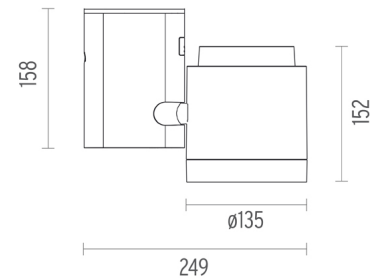

60.6989

QR-III

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
6 °

Color temperature (K):
3000 °K

Catalog reference:
60.6989

Lamp type:
QR-III

CERTIFICATIONS

