

FORT KNOX I CEILING

Number of heads

Mounting Ceiling surface

Lamps description LED Array 9,2W 945 lm 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 220/240 Environment Indoor



Light controller descriptionProtection glassAimingAdjustableLight distribution symmetrySymmetricBeam angle58° Wide Flood

ELECTRICAL


Transformer availability Included
Transformer mounting Integral
Transformer type Electronic
Emergency Without
Insulation class Class I

PHYSICAL

Height (mm) 151 Spot diameter (mm) 60

Construction material Die-cast aluminum

Weight (kg) 0,70

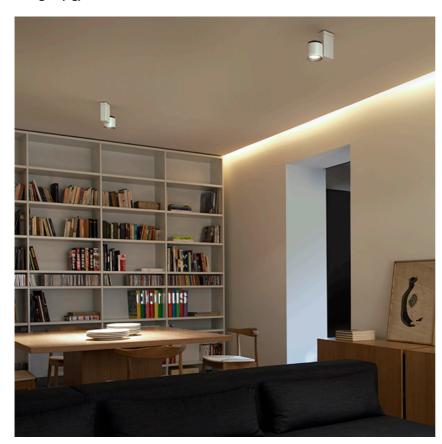




Fort Knox I Ceiling designed by Philippe Starck

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.

09.2157.30A - 620lm White

09.2157.05A - 620lm Polished aluminium

09.2157.14A - 620lm Black



CERTIFICATIONS













GWT 850°

Flos.architectural@flos.com www.flos.com



Fort Knox I Ceiling . Accessories

Optical







08.8501.65.OD



08.8502.14

08.8501.64.OD

Fort Knox I Ceiling designed by Philippe Starck

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium BLUE FILTER

SKY BLUE FILTER

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.

Colored filters in 3 mm dichroic material

Colored filters in 3 mm dichroic material









43 68 8

08.8501.66.OD

AMBER FILTER RED FILTER

08.8501.69 **HOT LIGHT**

Colored filters in 3 mm dichroic material



Colored filters in 3 mm dichroic material

08.8501.67.OD

material did















IP 20



Colored filters in 3 mm dichroic material

COLD LIGHT

08.8501.DL

DAYLIGHT

dichroic material

Colored filters in 3 mm

08.8501.ND

NEODIMIUM

Colored filters in 3 mm dichroic material

Flos.architectural@flos.com www.flos.com



Fort Knox I Ceiling . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array



Fort Knox I Ceiling designed by Philippe Starck

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.


09.2157.30A - 620lm White

09.2157.05A - 620lm

Polished aluminium

09.2157.14A - 620lm

Black



CERTIFICATIONS















ΙP 20

Flos.architectural@flos.com www.flos.com