FLOS

PURE I SPOT TRACK

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Track mounting Phosphor LED 17W 1400 Im 3000K CRI 98 Extreme Cut-off. See reference number 220/240 Indoor

OPTICAL

Light controller description Reflector finish Aiming Light distribution symmetry Beam angle

ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Width (mm) Spot diameter (mm) Construction material Weight (kg) 180 86 Aluminium 1,20

L

Protection glass

51° Wide Flood

Aluminum

Adjustable

Symmetric

Included

Integral

Electronic

Without Class I







Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220-240V – 50/60Hz for phosphor LED integrated LED integrated







FLOS


Pure | Spot Track . Accessories


Optical



FLOS

Pure | Spot Track . Accessories

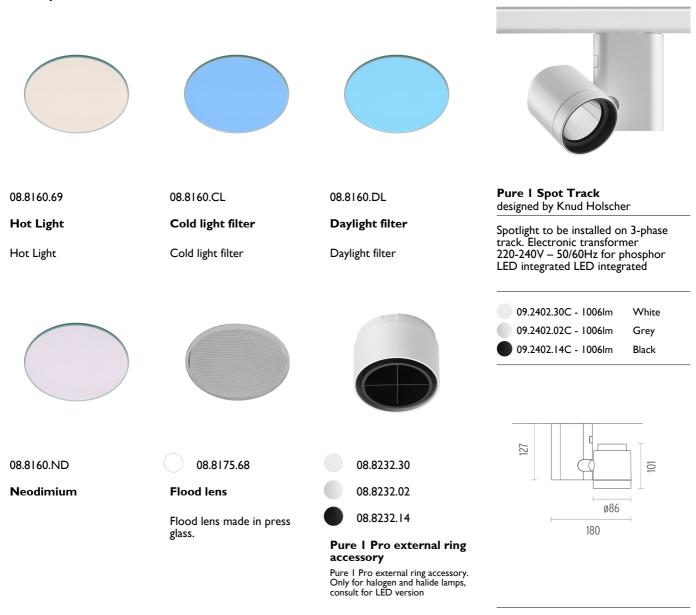





Pure | Spot Track . Lamps



Phosphor LED Lamp category: LED Lamp type: Phosphor LED



Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220-240V – 50/60Hz for phosphor LED integrated LED integrated



