PURE | SPOT TRACK

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Track mounting Power LED 15,7W 1400 Im 2700K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor

OPTICAL

Reflector finish Aiming Light distribution symmetry Beam angle

ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,20

80

L

Aluminum

Adjustable

Symmetric

Included


Integral

Electronic

Without

Class I

23° Medium

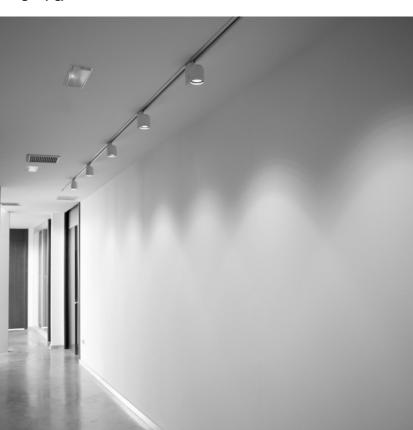





Pure I Spot Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.










Pure | Spot Track . Accessories

Optical

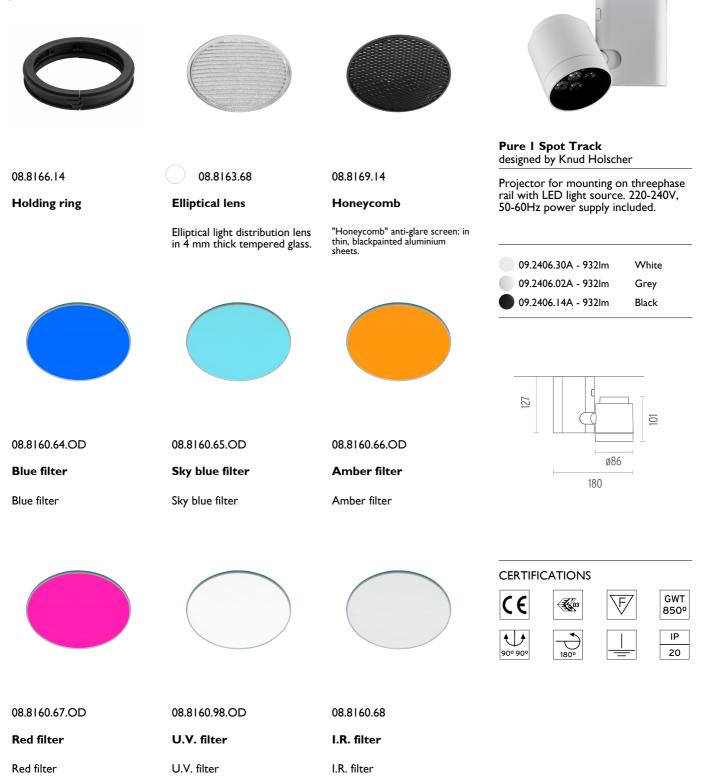

Pure | Spot Track . Accessories

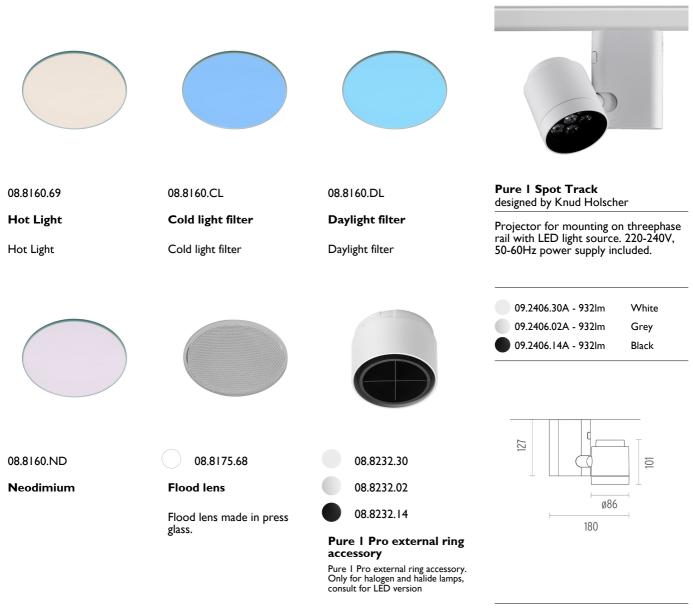



Pure | Spot Track . Lamps



Power LED LED Socket: Special base Lamp type: Power LED



Pure I Spot Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.



