# FLOS

### PURE | SPOT TRACK

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Track mounting Phosphor LED 19,5VV 2000 Im 3000K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor

### OPTICAL

Light controller description Reflector finish Aiming Light distribution symmetry Beam angle

## ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

### PHYSICAL

Width (mm) Spot diameter (mm) Construction material Weight (kg) 180 86 Aluminium 1,20

L

Protection glass

Aluminum

Adjustable

Symmetric

Included

Integral

Electronic

Without Class I

23° Medium







Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220-240V – 50/60Hz for phosphor LED integrated LED integrated

09.2410.30C - 1376lm	White
09.2410.02C - 1376lm	Grey
09.2410.14C - 1376lm	Black





# FLOS


## Pure | Spot Track . Accessories


#### Optical



# FLOS

## Pure | Spot Track . Accessories

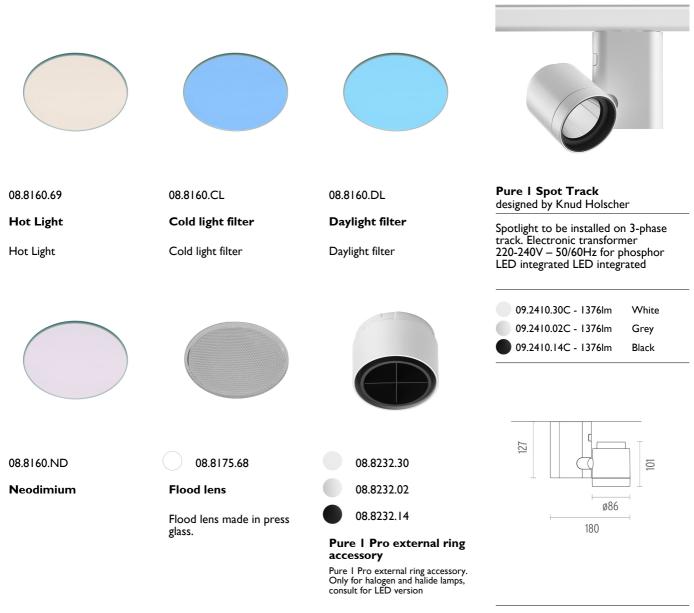





Pure | Spot Track . Lamps



Phosphor LED Lamp category: LED Lamp type: Phosphor LED



Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220-240V – 50/60Hz for phosphor LED integrated LED integrated



