

PURE I SPOT TRACK

Number of heads

Mounting Track mounting

Lamps descriptionPhosphor LED 19,5W 2000 Im 3000K CRI 80Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240
Environment Indoor

OPTICAL

Light controller descriptionProtection glassReflector finishAluminumAimingAdjustableLight distribution symmetrySymmetricBeam angle51° Wide Flood


ELECTRICAL

Transformer availability Included
Transformer mounting Integral
Transformer type Electronic
Emergency Without
Insulation class Class I

PHYSICAL

Width (mm) 180 Spot diameter (mm) 86

Construction material Aluminium Weight (kg) 1,20

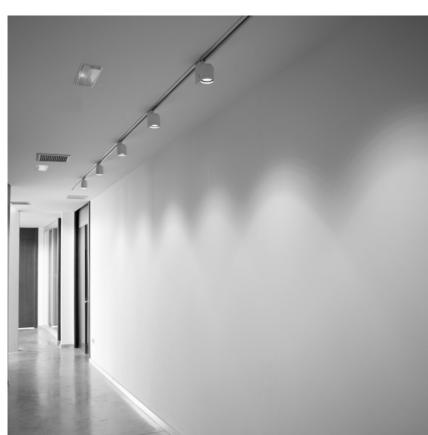




Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220-240V – 50/60Hz for phosphor LED integrated LED integrated

09.2412.30C - 1415lm White
09.2412.02C - 1415lm Grey
09.2412.14C - 1415lm Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



Pure I Spot Track . Accessories

Optical









08.8166.14

Holding ring

08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass. 08.8169.14


Honeycomb

"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.


Pure I Spot Track designed by Knud Holscher


Spotlight to be installed on 3-phase track. Electronic transformer 220-240V – 50/60Hz for phosphor LED integrated LED integrated

09.2412.30C - 1415lm White 09.2412.02C - 1415lm Grey 09.2412.14C - 1415lm Black









08.8160.64.OD

Blue filter

Blue filter

08.8160.65.OD

Sky blue filter

Sky blue filter

08.8160.66.OD

Amber filter

Amber filter







CERTIFICATIONS









08.8160.67.OD

Red filter

Red filter

08.8160.98.OD

U.V. filter

U.V. filter

08.8160.68

I.R. filter

I.R. filter







Flos.architectural@flos.com www.flos.com



Pure I Spot Track . Accessories









08.8160.69

Hot Light

Hot Light

08.8160.CL

Cold light filter

Cold light filter

08.8160.DL

Daylight filter

Daylight filter

Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220-240V – 50/60Hz for phosphor LED integrated LED integrated







09.2412.30C - 1415lm White 09.2412.02C - 1415lm Grey

Black

09.2412.14C - 1415lm

08.8160.ND

Neodimium

08.8175.68

Flood lens


Flood lens made in press glass.

08.8232.30

08.8232.02 08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



Pure I Spot Track . Lamps



Phosphor LED
Lamp category:
LED
Lamp type:


Phosphor LED



Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220-240V – 50/60Hz for phosphor LED integrated LED integrated

09.2412.30C - 1415lm White
09.2412.02C - 1415lm Grey
09.2412.14C - 1415lm Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com