### PURE I SPOT PRO TRACK

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Track mounting Power LED 15,7W 1400 lm 2700K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor

#### OPTICAL

**Reflector finish** Aluminum Aiming Adjustable Light distribution symmetry Symmetric 14° Spot Beam angle

#### ELECTRICAL

Transformer availability **Transformer mounting** Transformer type Emergency Insulation class

### PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Alum
Weight (kg)	1,40



Included

Т

ninium







Pure | Spot Pro Track designed by Knud Holscher


Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.

09.2425.30A - 897lm	White
09.2425.02A - 897lm	Grey
<b>09.2425.14A - 897</b> lm	Black





#### Pure | Spot Pro Track . Accessories

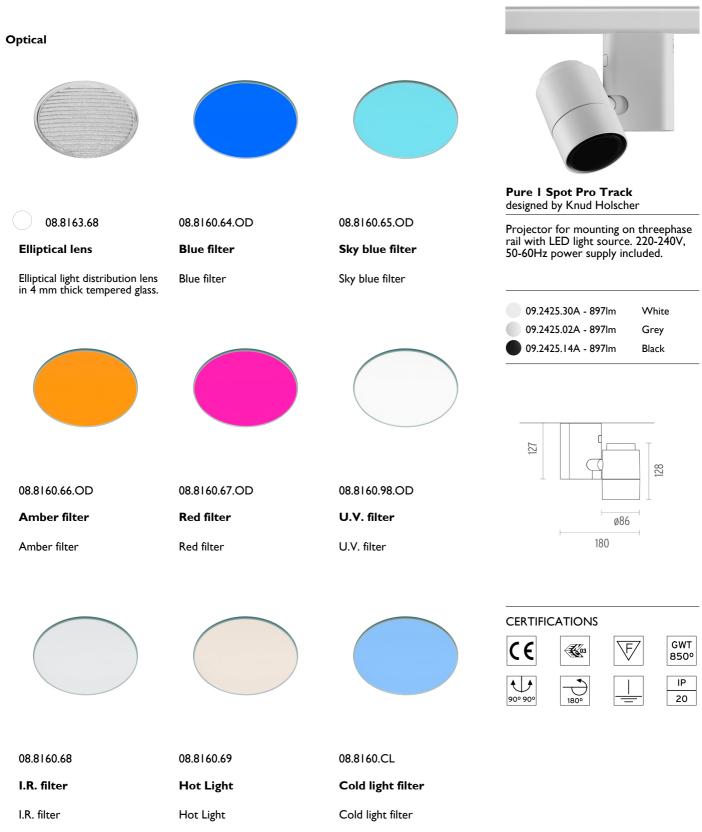

### Pure | Spot Pro Track . Accessories





08.8160.DL

Daylight filter

08.8160.ND

Daylight filter

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.


White
Grey
Black




08.8186.14

Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.





Pure | Spot Pro Track . Lamps



Power LED LED Socket: Special base Lamp type: Power LED



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.



