PURE I SPOT PRO TRACK

Т

Aluminum

Adjustable

Symmetric

Included

Integral

Electronic

Without

Class I

20° Medium

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Track mounting Power LED 15,7W 1400 Im 2700K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor

OPTICAL

Reflector finish Aiming Light distribution symmetry Beam angle


ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Alu
Weight (kg)	1,40

80 86 Aluminium ,40

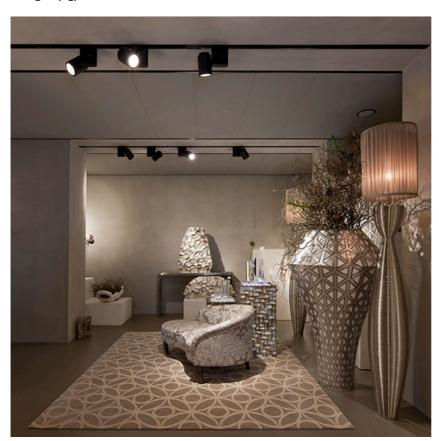





Pure I Spot Pro Track designed by Knud Holscher


Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.







Pure | Spot Pro Track . Accessories

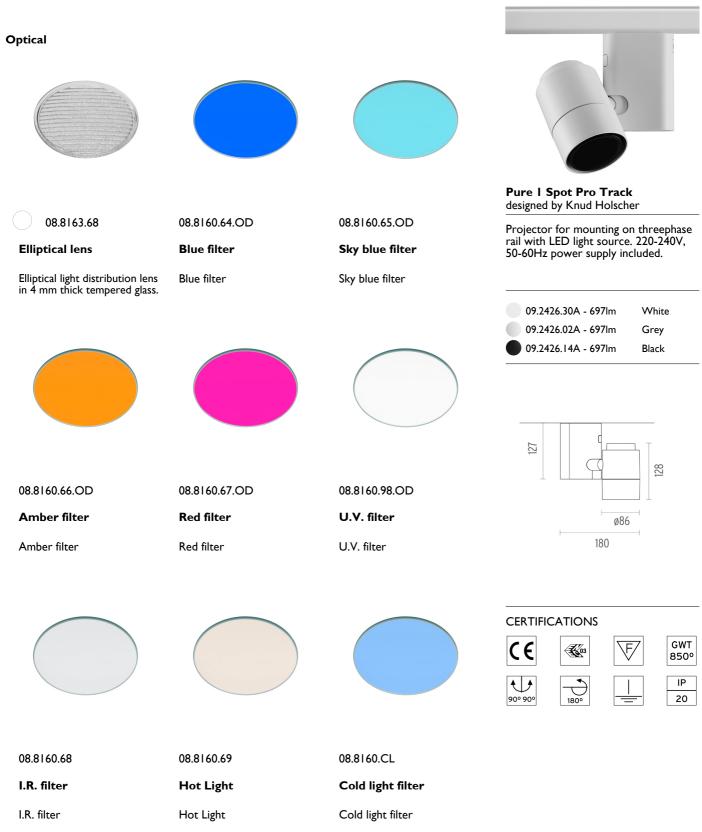

Pure | Spot Pro Track . Accessories





08.8160.DL

Daylight filter

08.8160.ND

Daylight filter

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.


09.2426.30A - 697lm	White
09.2426.02A - 697lm	Grey
09.2426.14A - 697 lm	Black




08.8186.14

Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.





Pure | Spot Pro Track . Lamps



Power LED LED Socket: Special base Lamp type: Power LED



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.



