### PURE I SPOT PRO TRACK

Т

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Track mounting Power LED 15,7W 1400 Im 2700K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor

#### OPTICAL

Reflector finishAluminumAimingAdjustableLight distribution symmetrySymmetricBeam angle30° Flood

#### ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

#### PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Alum
Weight (kg)	1,40


80 86 Aluminium

Included

Integral

Electronic

Without Class I

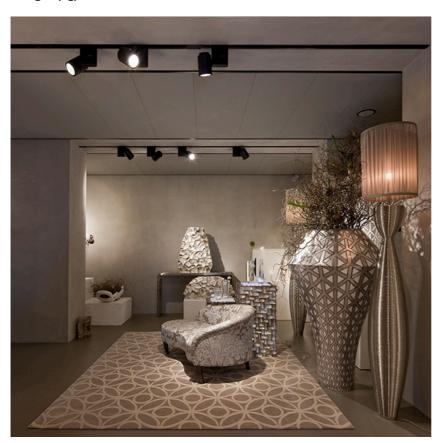





Pure I Spot Pro Track designed by Knud Holscher


Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.

09.2427.30A - 663lm	White
09.2427.02A - 663lm	Grey
<b>09.2427.14A - 663</b> lm	Black





### Pure | Spot Pro Track . Accessories

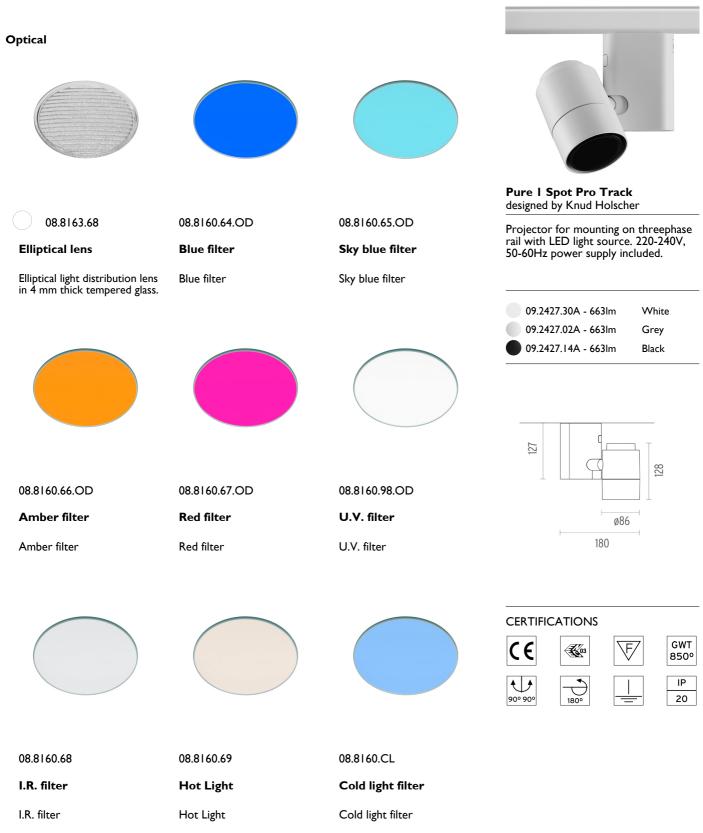

### Pure | Spot Pro Track . Accessories





08.8160.DL

Daylight filter

08.8160.ND

Daylight filter

Neodimium



Flood lens

Flood lens made in press glass.



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.


09.2427.30A - 663lm	White
09.2427.02A - 663lm	Grey
<b>09.2427.14A - 663</b> Im	Black




08.8186.14

Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.





Pure | Spot Pro Track . Lamps



Power LED LED Socket: Special base Lamp type: Power LED



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.



