## PURE I SPOT PRO TRACK

Т

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Track mounting Phosphor LED 19,5W 2000 Im 3000K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor

### OPTICAL

Reflector finishAluminumAimingAdjustableLight distribution symmetrySymmetricBeam angle34° Flood

### ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

### PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Alum
Weight (kg)	1,40

80 86 Aluminium

Included

Integral

Electronic

Without

Class I







Pure I Spot Pro Track designed by Knud Holscher


Spotlight to be installed on 3-phase track. Electronic transformer 220/240, 50/60Hz for phosphor LED integrated. LED integrated.

09.2432.30C - 693lm	White
09.2432.02C - 693lm	Grey
09.2432.14C - 693lm	Black






## Pure | Spot Pro Track . Accessories

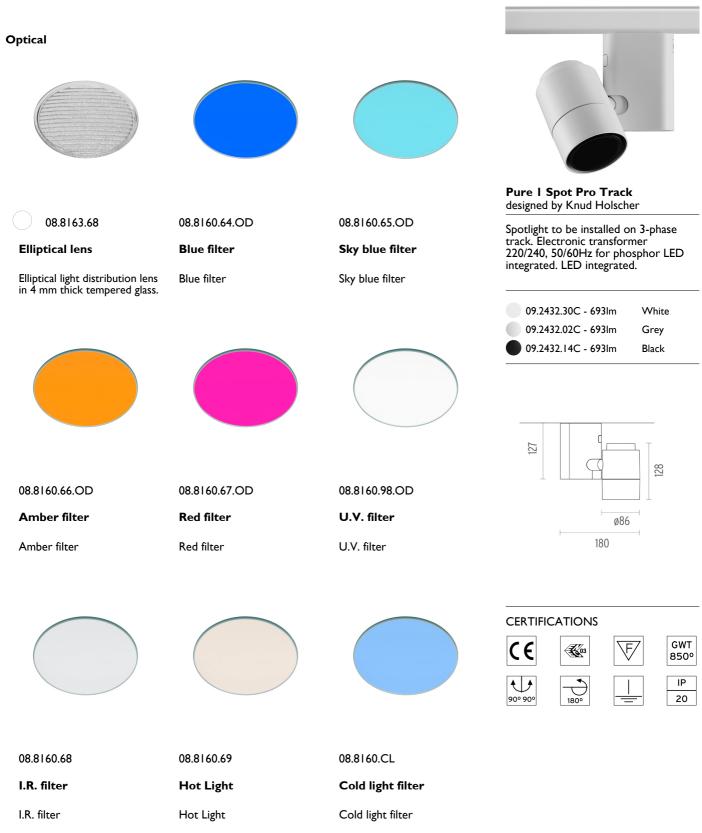

## Pure | Spot Pro Track . Accessories



08.8160.DL

08.8160.ND

Daylight filter

Neodimium



Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



Pure I Spot Pro Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220/240, 50/60Hz for phosphor LED integrated. LED integrated.


09.2432.30C - 693lm	White
09.2432.02C - 693lm	Grey
09.2432.14C - 693lm	Black




08.8186.14

Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.





Pure | Spot Pro Track . Lamps



Phosphor LED Lamp category: LED Lamp type: Phosphor LED



Pure I Spot Pro Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer 220/240, 50/60Hz for phosphor LED integrated. LED integrated.



