

### **PURE I SPOT PRO TRACK**

**Number of heads** 

**Mounting** Track mounting

Power LED 15,7W 1400 lm 3000K CRI 80 Lamps description Luminaire luminous flux Extreme Cut-off. See reference number

Voltage (V) 220/240 **Environment** Indoor

### **OPTICAL**


Reflector finish Aluminum **Aiming** Adjustable Light distribution symmetry Symmetric 30° Flood Beam angle

### **ELECTRICAL**

Transformer availability Included **Transformer mounting** Integral Transformer type Electronic **Emergency** Without **Insulation class** Class I

### **PHYSICAL**

Width (mm) 180 Spot diameter (mm) 86 **Construction material** Aluminium

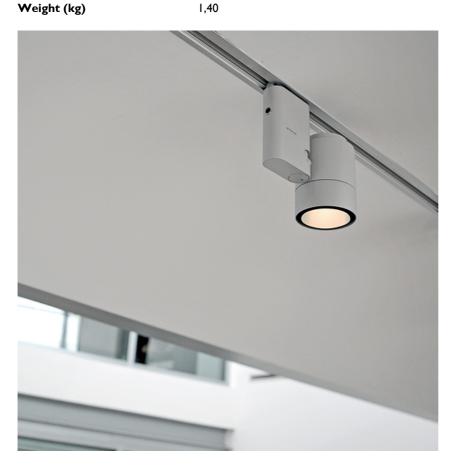




Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.

09.2437.30A - 719lm White 09.2437.02A - 719lm Grey 09.2437.14A - 719lm Black



### **CERTIFICATIONS**

















Flos.architectural@flos.com www.flos.com




# Pure I Spot Pro Track . Accessories

## **Optical**









Pure I Spot Pro Track designed by Knud Holscher

08.8160.65.OD

Sky blue filter

Sky blue filter

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.



08.8163.68
Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.

08.8160.64.OD

Blue filter

Blue filter





09.2437.02A - 719Im Grey
09.2437.14A - 719Im Black

08.8160.66.OD

Amber filter

Amber filter

08.8160.67.OD


**Red filter** 

Red filter

08.8160.98.OD


U.V. filter

U.V. filter



















90° 90°







08.8160.68

I.R. filter

I.R. filter

08.8160.69

Hot Light

Hot Light

08.8160.CL

**Cold light filter** 

Cold light filter

Flos.architectural@flos.com www.flos.com



## Pure I Spot Pro Track . Accessories









08.8160.DL

08.8160.ND

Pure I Spot Pro Track designed by Knud Holscher

**Daylight filter** 

Neodimium

Flood lens

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.

Daylight filter

Flood lens made in press glass.

08.8175.68



09.2437.30A - 719lm

White

09.2437.02A - 719lm

Grey


09.2437.14A - 719lm

Black

### 08.8186.14

# Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.



### **CERTIFICATIONS**

















Flos.architectural@flos.com www.flos.com



## Pure I Spot Pro Track . Lamps



**Power LED** 

Lamp category:

LED

Socket:

Special base

Lamp type:


Power LED



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.

09.2437.30A - 719lm White
09.2437.02A - 719lm Grey
09.2437.14A - 719lm Black



### **CERTIFICATIONS**

















Flos.architectural@flos.com www.flos.com