

PURE I SPOT CEILING

| | |
|--------------------------------|---------------------------------------|
| Number of heads | 1 |
| Mounting | Ceiling surface |
| Lamps description | Phosphor LED 17W 1400 lm 3000K CRI 98 |
| Luminaire luminous flux | Extreme Cut-off. See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |

OPTICAL

| | |
|-------------------------------------|------------------|
| Light controller description | Protection glass |
| Reflector finish | Aluminum |
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 23° Medium |

ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer availability | Included |
| Transformer mounting | Integral |
| Transformer type | Electronic |
| Emergency | Without |
| Insulation class | Class I |

PHYSICAL

| | |
|------------------------------|-----------|
| Width (mm) | 180 |
| Spot diameter (mm) | 86 |
| Construction material | Aluminium |
| Weight (kg) | 1,20 |




Pure I Spot Ceiling



designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer 220/240, 50/60hz for phosphor LED integrated. LED integrated

| | |
|-----------------------|-------|
| ● 09.2450.30C - 964lm | White |
| ● 09.2450.02C - 964lm | Grey |
| ● 09.2450.14C - 964lm | Black |

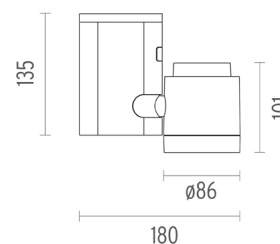

CERTIFICATIONS

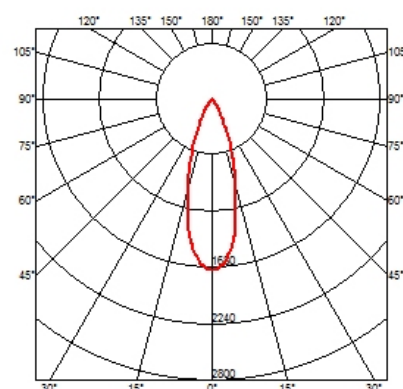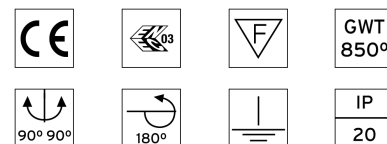

Pure I Spot Ceiling . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer 220/240, 50/60hz for phosphor LED integrated. LED integrated


- 09.2450.30C - 964lm White
- 09.2450.02C - 964lm Grey
- 09.2450.14C - 964lm Black



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter



Sky blue filter



08.8160.66.OD

Amber filter

Amber filter

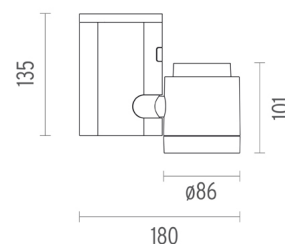

08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter





08.8160.68

I.R. filter

I.R. filter

CERTIFICATIONS

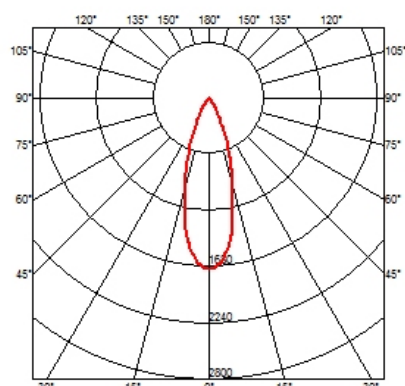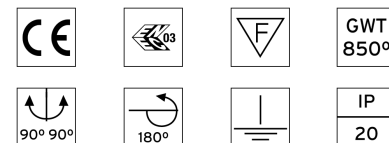


Pure I Spot Ceiling . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



Pure I Spot Ceiling

designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer 220/240, 50/60hz for phosphor LED integrated. LED integrated

- 09.2450.30C - 964lm White
- 09.2450.02C - 964lm Grey
- 09.2450.14C - 964lm Black



08.8160.ND

Neodimium



○ 08.8175.68

Flood lens

Flood lens made in press glass.




● 08.8232.30

● 08.8232.02

● 08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version

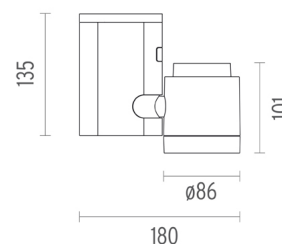


CERTIFICATIONS



GWT
850°



IP
20

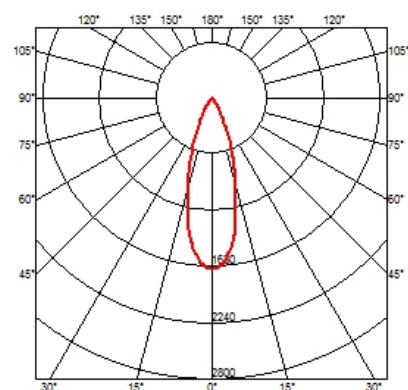

Pure I Spot Ceiling . Lamps



Phosphor LED

Lamp category:
LED


Lamp type:
Phosphor LED



Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/
wall. Electronic transformer 220/240,
50/60hz for phosphor LED integrated.
LED integrated

| | | |
|---|---------------------|-------|
| ● | 09.2450.30C - 964lm | White |
| ● | 09.2450.02C - 964lm | Grey |
| ● | 09.2450.14C - 964lm | Black |



CERTIFICATIONS

