

PURE I SPOT CEILING

Number of heads	1
Mounting	Ceiling surface
Lamps description	Power LED 15,7W 1400 lm 2700K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	37° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,20





Pure I Spot Ceiling


designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.

● 09.2457.30A - 956lm	White
● 09.2457.02A - 956lm	Grey
● 09.2457.14A - 956lm	Black

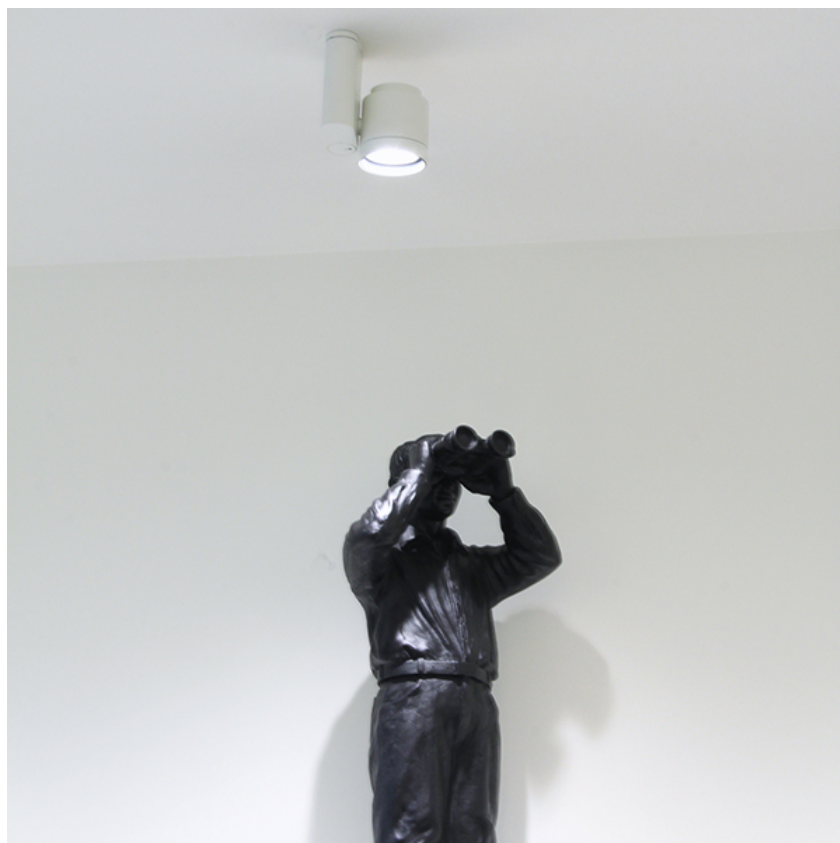

CERTIFICATIONS

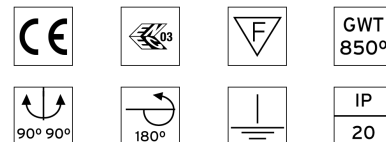

Pure I Spot Ceiling . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure I Spot Ceiling designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.


- 09.2457.30A - 956lm White
- 09.2457.02A - 956lm Grey
- 09.2457.14A - 956lm Black



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter



Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter

I.R. filter

CERTIFICATIONS




Pure I Spot Ceiling . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



Pure I Spot Ceiling designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



08.8232.30


08.8232.02

08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version

- 09.2457.30A - 956lm White
- 09.2457.02A - 956lm Grey
- 09.2457.14A - 956lm Black



CERTIFICATIONS



Pure I Spot Ceiling . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Pure I Spot Ceiling designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.

● 09.2457.30A - 956lm	White
● 09.2457.02A - 956lm	Grey
● 09.2457.14A - 956lm	Black



CERTIFICATIONS

CE	RoHS	F	GWT 850°
90° 90°	180°	IP	20