

PURE I SPOT CEILING

Number of heads

Mounting Ceiling surface

Lamps descriptionPhosphor LED 19,5W 2000 Im 3000K CRI 80Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240
Environment Indoor



Light controller descriptionProtection glassReflector finishAluminumAimingAdjustableLight distribution symmetrySymmetricBeam angle23° Medium


ELECTRICAL

Transformer availability Included
Transformer mounting Integral
Transformer type Electronic
Emergency Without
Insulation class Class I

PHYSICAL

Width (mm) 180 Spot diameter (mm) 86

Construction material Aluminium Weight (kg) 1,20

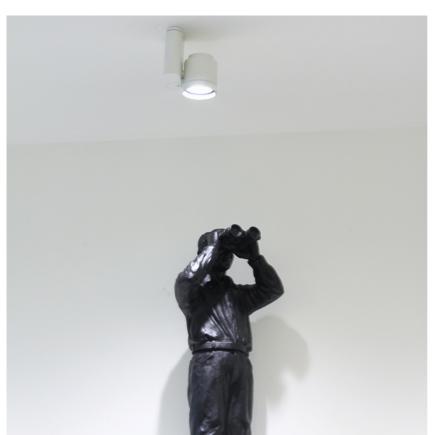




Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer 220/240, 50/60hz for phosphor LED integrated. LED integrated

09.2460.30C - 1376lm White
09.2460.02C - 1376lm Grey
09.2460.14C - 1376lm Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



Pure I Spot Ceiling . Accessories

Optical









08.8166.14

Holding ring

08.8163.68

Elliptical lens

08.8169.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.

Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer 220/240, 50/60hz for phosphor LED integrated. LED integrated





Elliptical light distribution lens in 4 mm thick tempered glass.







08.8160.64.OD

Blue filter

Blue filter



Sky blue filter


Sky blue filter





Amber filter

Amber filter









CERTIFICATIONS















08.8160.67.OD

Red filter

Red filter

08.8160.98.OD

U.V. filter

U.V. filter

08.8160.68

I.R. filter

I.R. filter

Flos.architectural@flos.com www.flos.com



Pure I Spot Ceiling . Accessories









08.8160.69

Hot Light

Hot Light

08.8160.CL

Cold light filter

Cold light filter

08.8160.DL

Daylight filter

Daylight filter

Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer 220/240, 50/60hz for phosphor LED integrated. LED integrated







09.2460.30C - 1376lm White 09.2460.02C - 1376lm Grey

09.2460.14C - 1376lm Black

08.8160.ND

Neodimium

08.8175.68

Flood lens


Flood lens made in press glass.

08.8232.30 08.8232.02

08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



Pure I Spot Ceiling . Lamps




Phosphor LED
Lamp category:
LED
Lamp type:
Phosphor LED



Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer 220/240, 50/60hz for phosphor LED integrated. LED integrated

09.2460.30C - 1376lm White 09.2460.02C - 1376lm Grey 09.2460.14C - 1376lm Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com