

# FLOS

## PURE I SPOT CEILING

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling surface
<b>Lamps description</b>	Power LED 15,7W 1400 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor

### OPTICAL

<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	15° Spot

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I

### PHYSICAL


<b>Width (mm)</b>	180
<b>Spot diameter (mm)</b>	86
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,20




### Pure I Spot Ceiling designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.

● 09.2465.30A - 1138lm	White
● 09.2465.02A - 1138lm	Grey
● 09.2465.14A - 1138lm	Black



### CERTIFICATIONS

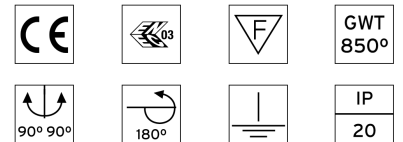

## Pure I Spot Ceiling . Accessories

### Optical



08.8166.14

**Holding ring**



08.8163.68

**Elliptical lens**

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

**Honeycomb**


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



**Pure I Spot Ceiling**  
designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.


- 09.2465.30A - 1138lm White
- 09.2465.02A - 1138lm Grey
- 09.2465.14A - 1138lm Black



08.8160.64.OD

**Blue filter**


Blue filter



08.8160.65.OD

**Sky blue filter**



Sky blue filter



08.8160.66.OD

**Amber filter**

Amber filter



08.8160.67.OD

**Red filter**

Red filter



08.8160.98.OD

**U.V. filter**

U.V. filter



08.8160.68

**I.R. filter**

I.R. filter

### CERTIFICATIONS




## Pure I Spot Ceiling . Accessories



08.8160.69

### Hot Light


Hot Light



08.8160.CL

### Cold light filter

Cold light filter



08.8160.DL

### Daylight filter

Daylight filter



### Pure I Spot Ceiling

designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.

- 09.2465.30A - 1138lm White
- 09.2465.02A - 1138lm Grey
- 09.2465.14A - 1138lm Black



08.8160.ND

### Neodimium



○ 08.8175.68

### Flood lens

Flood lens made in press glass.




● 08.8232.30

● 08.8232.02

● 08.8232.14

### Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version



### CERTIFICATIONS



## Pure I Spot Ceiling . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Power LED



**Pure I Spot Ceiling**  
designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.

- 09.2465.30A - 1138lm White
- 09.2465.02A - 1138lm Grey
- 09.2465.14A - 1138lm Black



**CERTIFICATIONS**

