

PURE I SPOT CEILING

| | |
|-------------------------|---------------------------------------|
| Number of heads | 1 |
| Mounting | Ceiling surface |
| Lamps description | Power LED 15,7W 1400 lm 3000K CRI 80 |
| Luminaire luminous flux | Extreme Cut-off. See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |

OPTICAL

| | |
|-----------------------------|------------|
| Reflector finish | Aluminum |
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 37° Flood |

ELECTRICAL

| | |
|--------------------------|------------|
| Transformer availability | Included |
| Transformer mounting | Integral |
| Transformer type | Electronic |
| Emergency | Without |
| Insulation class | Class I |

PHYSICAL

| | |
|-----------------------|-----------|
| Width (mm) | 180 |
| Spot diameter (mm) | 86 |
| Construction material | Aluminium |
| Weight (kg) | 1,20 |





Pure I Spot Ceiling

designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.

| | |
|----------------------|-------|
| 09.2467.30A - 1042lm | White |
| 09.2467.02A - 1042lm | Grey |
| 09.2467.14A - 1042lm | Black |

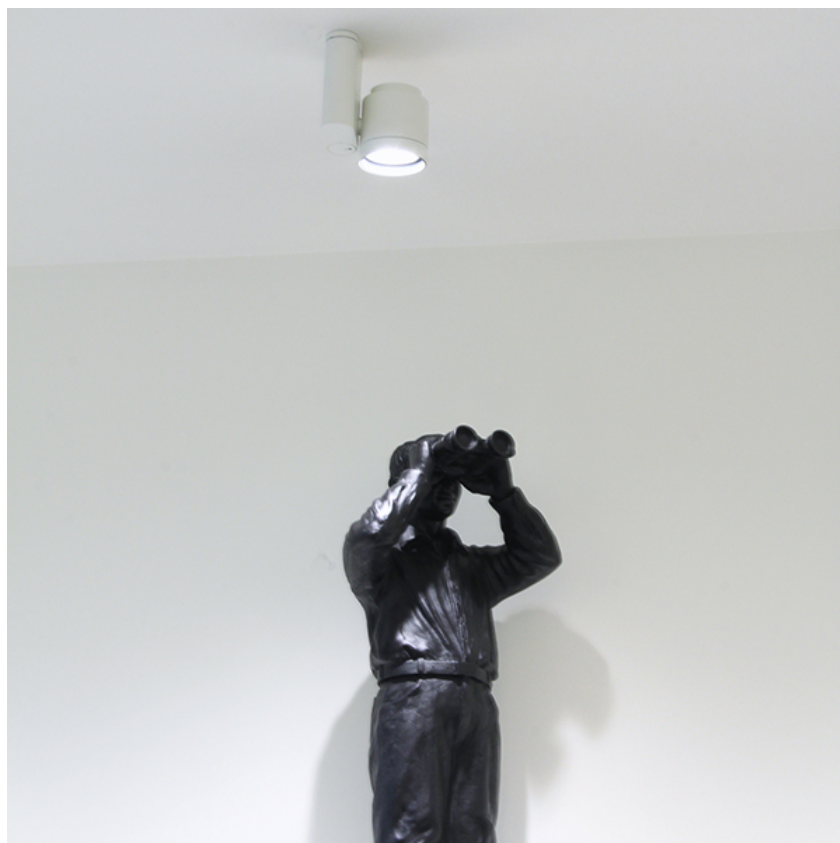

CERTIFICATIONS



Pure I Spot Ceiling . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure I Spot Ceiling designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.


- 09.2467.30A - 1042lm White
- 09.2467.02A - 1042lm Grey
- 09.2467.14A - 1042lm Black



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter



Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter

I.R. filter

CERTIFICATIONS




Pure I Spot Ceiling . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



Pure I Spot Ceiling designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



08.8232.30


08.8232.02

08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version

- 09.2467.30A - 1042lm White
- 09.2467.02A - 1042lm Grey
- 09.2467.14A - 1042lm Black



CERTIFICATIONS



Pure I Spot Ceiling . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Pure I Spot Ceiling designed by Knud Holscher

Projector for mounting in ceiling/ wall with LED light source. 220- 240V, 50-60Hz power supply included.

- 09.2467.30A - 1042lm White
- 09.2467.02A - 1042lm Grey
- 09.2467.14A - 1042lm Black



CERTIFICATIONS

