

PURE | SPOT PRO CEILING

Number of heads	1
Mounting	Ceiling surface
Lamps description	Power LED 15,7W 1400 lm 2700K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	30° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,40




Pure I Spot Pro Ceiling


designed by Knud Holscher

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.

● 09.2477.30A - 663lm	White
● 09.2477.02A - 663lm	Grey
● 09.2477.14A - 663lm	Black



CERTIFICATIONS

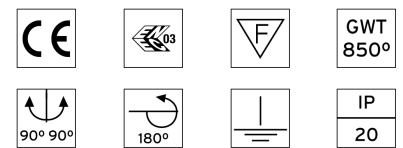

Pure I Spot Pro Ceiling . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter

Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



Pure I Spot Pro Ceiling designed by Knud Holscher

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.


- 09.2477.30A - 663lm White
- 09.2477.02A - 663lm Grey
- 09.2477.14A - 663lm Black



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter


Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light




08.8160.CL


Cold light filter

Cold light filter

CERTIFICATIONS

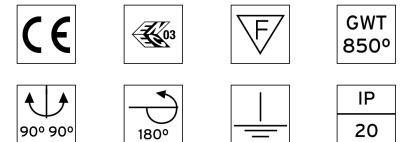


Pure I Spot Pro Ceiling . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



○ 08.8175.68

Flood lens

Flood lens made in press glass.



Pure I Spot Pro Ceiling designed by Knud Holscher

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.


- 09.2477.30A - 663lm White
- 09.2477.02A - 663lm Grey
- 09.2477.14A - 663lm Black



08.8186.14

Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.



CERTIFICATIONS



Pure I Spot Pro Ceiling . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Pure I Spot Pro Ceiling
designed by Knud Holscher

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.

- 09.2477.30A - 663lm White
- 09.2477.02A - 663lm Grey
- 09.2477.14A - 663lm Black



CERTIFICATIONS

