

PURE | SPOT PRO CEILING

Number of heads	1
Mounting	Ceiling surface
Lamps description	Power LED 15,7W 1400 lm 3000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	14° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL



Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,40




Pure | Spot Pro Ceiling designed by Knud Holscher

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.

● 09.2485.30A - 966lm	White
● 09.2485.02A - 966lm	Grey
● 09.2485.14A - 966lm	Black

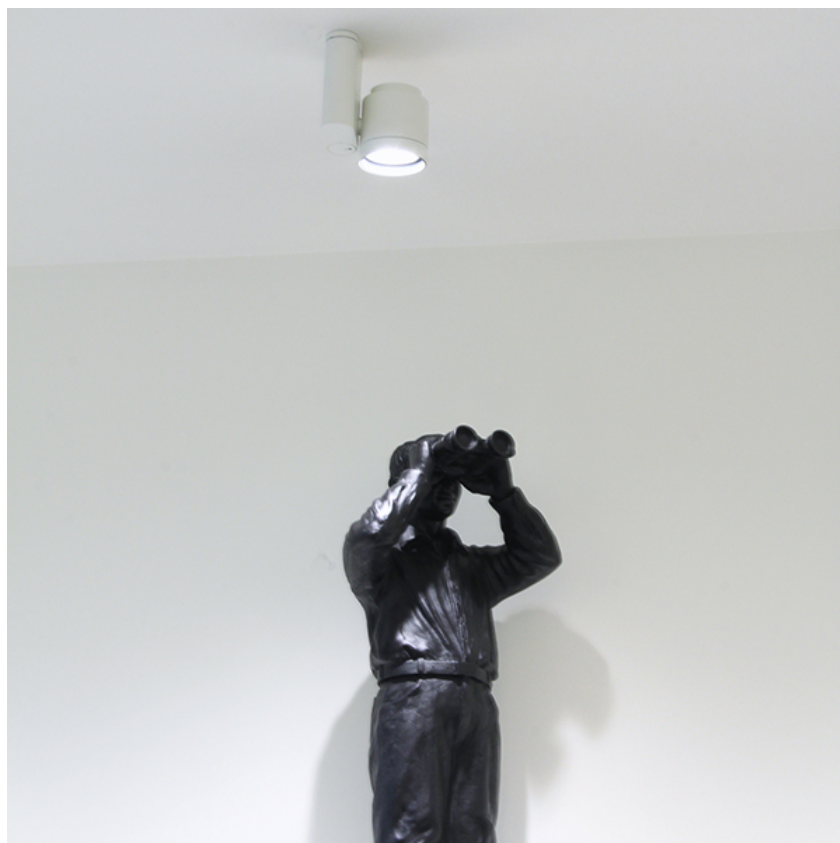

CERTIFICATIONS

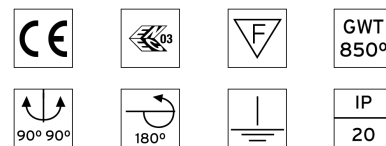

Pure I Spot Pro Ceiling . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light



08.8160.CL

Cold light filter


Cold light filter



Pure I Spot Pro Ceiling designed by Knud Holscher

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.


09.2485.30A - 966lm	White
09.2485.02A - 966lm	Grey
09.2485.14A - 966lm	Black



CERTIFICATIONS



Pure I Spot Pro Ceiling . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



Pure I Spot Pro Ceiling

designed by Knud Holscher

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.


09.2485.30A - 966lm	White
09.2485.02A - 966lm	Grey
09.2485.14A - 966lm	Black



08.8186.14

Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.



CERTIFICATIONS



Pure I Spot Pro Ceiling . Lamps



Power LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Power LED



Pure I Spot Pro Ceiling designed by Knud Holscher

Projector for mounting in ceiling/wall with LED light source. 220-240V, 50-60Hz power supply included.

●	09.2485.30A - 966lm	White
●	09.2485.02A - 966lm	Grey
●	09.2485.14A - 966lm	Black



CERTIFICATIONS

