

PURE | SPOT TRACK

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 17,5W 2115 lm 3000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Light controller description	Protection glass
Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL



Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,20




Pure | Spot Track designed by Knud Holscher

Projector for mounting on three-phase rail with LED light source. 220-240V, 50-60Hz power supply included.

● 09.2570.30A - 1631lm	White
● 09.2570.02A - 1631lm	Grey
● 09.2570.14A - 1631lm	Black

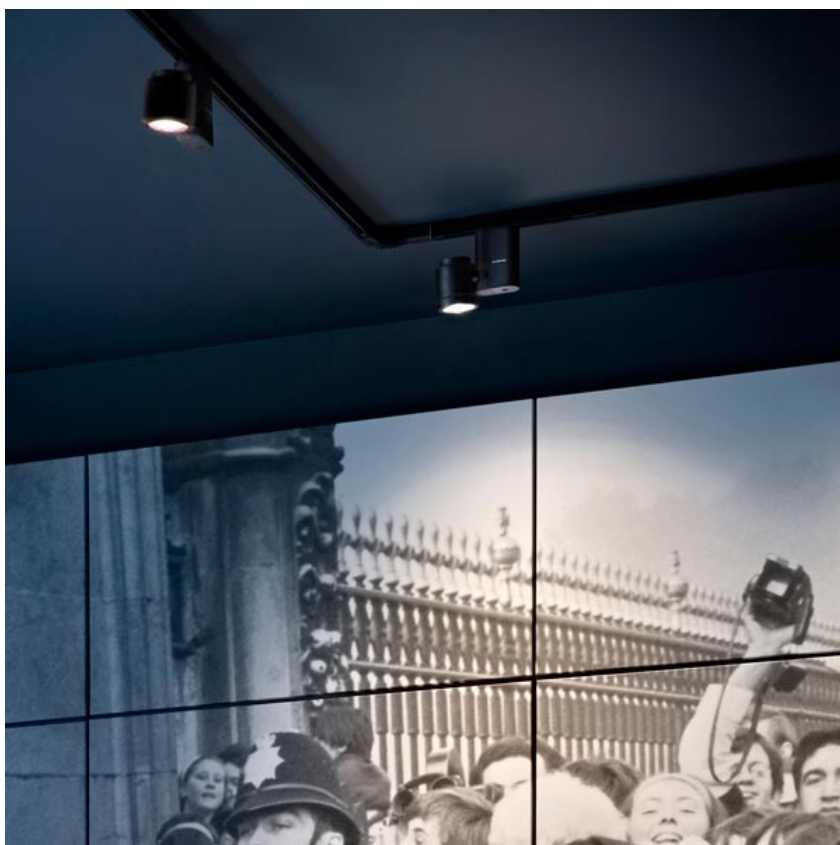

CERTIFICATIONS

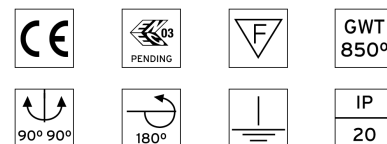

Pure I Spot Track . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter

Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter

I.R. filter



08.8160.69

Hot Light


Hot Light



Pure I Spot Track designed by Knud Holscher

Projector for mounting on three-phase rail with LED light source. 220-240V, 50-60Hz power supply included.


- 09.2570.30A - 1631lm White
- 09.2570.02A - 1631lm Grey
- 09.2570.14A - 1631lm Black

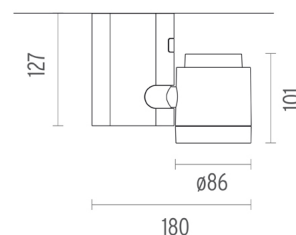

CERTIFICATIONS




Pure I Spot Track . Accessories



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



Pure I Spot Track designed by Knud Holscher

Projector for mounting on three-phase rail with LED light source. 220-240V, 50-60Hz power supply included.



08.8175.68

Flood lens

Flood lens made in press glass.



08.8232.30


08.8232.02

08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version

- 09.2570.30A - 1631lm White
- 09.2570.02A - 1631lm Grey
- 09.2570.14A - 1631lm Black



CERTIFICATIONS



Pure I Spot Track . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




Pure I Spot Track

designed by Knud Holscher

Projector for mounting on three-phase rail with LED light source. 220-240V, 50-60Hz power supply included.

- 09.2570.30A - 1631lm White
- 09.2570.02A - 1631lm Grey
- 09.2570.14A - 1631lm Black



CERTIFICATIONS

