PURE I SPOT PRO TRACK

L

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Track mounting LED Array 17,5W 2115 Im 3000K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor

OPTICAL

Reflector finishAluminumAimingAdjustableLight distribution symmetrySymmetricBeam angle18° Spot

ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Width (mm) Spot diameter (mm) Construction material Weight (kg) 180 86 Aluminium 1,40

Included

Integral

Electronic

Without

Class I






Pure I Spot Pro Track designed by Knud Holscher


Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.

09.2580.30A - 808lm	White
09.2580.02A - 808lm	Grey
09.2580.14A - 808lm	Black



CERTIFICATIONS \overbrace{CCC}^{WT} $\overbrace{PENDING}^{WT}$ \overbrace{F}^{WT} $\overbrace{B50^{\circ}}^{WT}$ $\overbrace{IB0^{\circ}}^{WT}$ $\overbrace{I}_{IB0^{\circ}}^{WT}$ $\overbrace{I}_{IB0^{\odot$

Pure | Spot Pro Track . Accessories

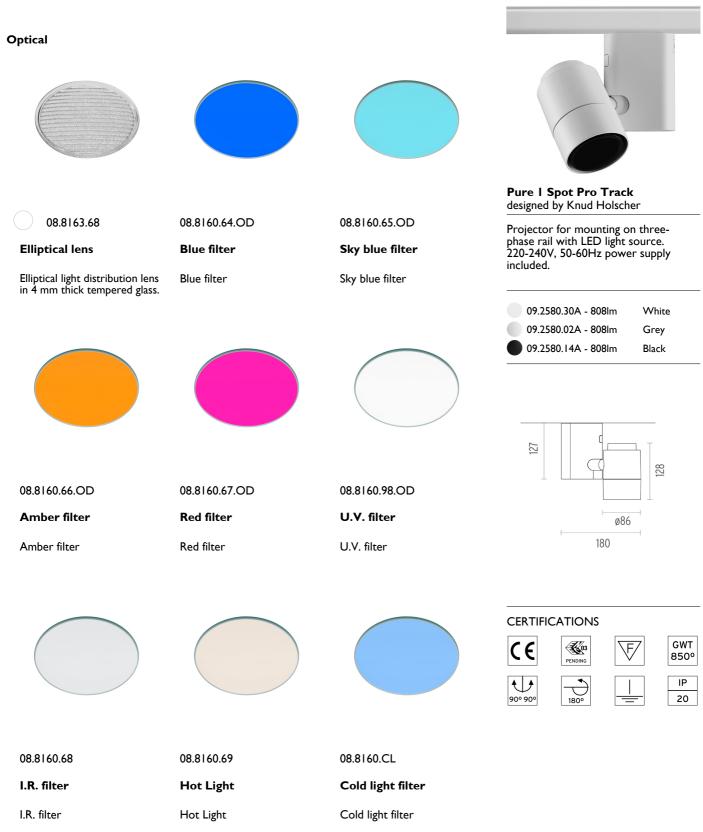

Pure | Spot Pro Track . Accessories





08.8160.DL

08.8160.ND

Daylight filter

Neodimium



Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.


09.2580.30A - 808lm	White
09.2580.02A - 808lm	Grey
09.2580.14A - 808lm	Black




08.8186.14

Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.





Pure | Spot Pro Track . Lamps



LED Array LED Socket: Special base Lamp type: LED Array



Pure I Spot Pro Track designed by Knud Holscher

Projector for mounting on threephase rail with LED light source. 220-240V, 50-60Hz power supply included.



