## FLOS

## SOLID PURE TRACK DALI VERSION

Number of heads	I
Design awards	Red [
Mounting	Three
Lamps description	LED /
Luminaire luminous flux	See r
Voltage (V)	220/2
Environment	Indoc

Dot Design Award Winner 2013 ee phase track Array 30W 3667 Im 4000K CRI 80 reference number 240 or

### **OPTICAL**

Light controller description Aiming Light distribution symmetry **Beam angle** 

### ELECTRICAL

Transformer availability **Transformer mounting** Transformer type Emergency Insulation class

### PHYSICAL

D Н S С ۷

Flos.architectural@flos.com

Integral Electronic dimmable dali Without Class I

Protection glass

Adjustable

Symmetric

Included

S/N

103


1,70

239,5

Aluminium

22° Medium


Diameter (mm)
leight (mm)
pot diameter (mm)
Construction material
Veight (kg)

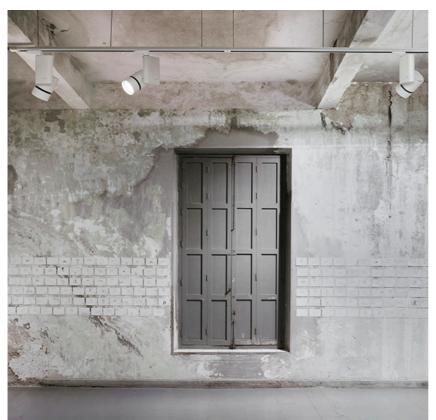





Solid Pure Track Dali Version designed by Knud Holscher

Spotlight to be installed on 3-circuit-track with LED light source. Integrated power supply 220-240V / 50-60Hz.





### CERTIFICATIONS



## FLOS

### Solid Pure Track Dali Version . Accessories



# CERTIFICATIONS

## FLOS

Solid Pure Track Dali Version . Lamps



LED Array LED Socket: Special base Lamp type: LED Array



Solid Pure Track Dali Version designed by Knud Holscher

Spotlight to be installed on 3-circuittrack with LED light source. Integrated power supply 220-240V / 50-60Hz.

