

SOLID PURE TRACK DALI VERSION

Number of heads

Design awards Red Dot Design Award Winner 2013

Mounting Three phase track

Lamps description LED Array 30W 3667 lm 4000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 220/240 Environment Indoor

OPTICAL

Light controller descriptionProtection glassAimingAdjustableLight distribution symmetrySymmetricBeam angle44° Flood

ELECTRICAL


Transformer availability Included
Transformer mounting Integral

Transformer type Electronic dimmable dali

Emergency Without Insulation class Class I

PHYSICAL

Diameter (mm)S/NHeight (mm)239,5Spot diameter (mm)103Construction materialAluminiumWeight (kg)1,70

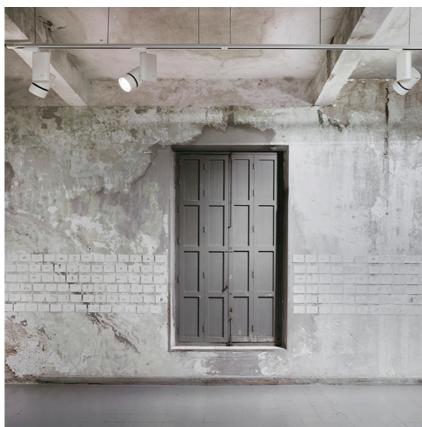




Solid Pure Track Dali Version designed by Knud Holscher

Spotlight to be installed on 3-circuittrack with LED light source. Integrated power supply 220-240V / 50-60Hz.

09.2881.30.DA - 3162lm White
09.2881.14.DA - 3162lm Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



Solid Pure Track Dali Version . Accessories

Optical





08.8763.14

screen

Honeycomb anti-glare

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



08.8766.64.OD

Blue filter

Blue filter

Solid Pure Track Dali Version designed by Knud Holscher

Spotlight to be installed on 3-circuittrack with LED light source. Integrated power supply 220-240V / 50-60Hz.

00 2001 20 D

09.2881.30.DA - 3162lm White

09.2881.14.DA - 3162lm Black




08.8768.14

Holding ring

Holding ring







ø103

08.8766.65.OD

Sky blue filter

Sky blue filter

08.8766.66.OD

Amber filter

Amber filter

08.8766.67.OD

Red filter

Red filter

CERTIFICATIONS















Flos.architectural@flos.com www.flos.com



Solid Pure Track Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



Solid Pure Track Dali Version designed by Knud Holscher

Spotlight to be installed on 3-circuittrack with LED light source. Integrated power supply 220-240V / 50-60Hz.

09.2881.30.DA - 3162lm White
09.2881.14.DA - 3162lm Black



CERTIFICATIONS















IP 20