

SOLID PURE CEILING/WALL DALI VERSION

Number of heads	1
Design awards	Red Dot Design Award Winner 2013
Mounting	Ceiling surface, Wall surface
Lamps description	LED Array 30W 3667 lm 4000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor



OPTICAL

Light controller description	Protection glass
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	22° Medium

Solid Pure Ceiling/Wall Dali Version
designed by Knud Holscher

Spotlight to be installed on ceiling/wall with LED light source. Integrated power supply 220-240V / 50-60Hz.


ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I


- 09.2883.30.DA - 3200lm White
- 09.2883.14.DA - 3200lm Black

PHYSICAL

Diameter (mm)	S/N
Height (mm)	239,5
Spot diameter (mm)	103
Construction material	Aluminium
Weight (kg)	1,90

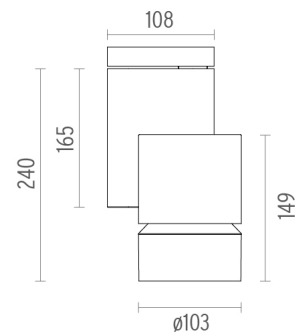

CERTIFICATIONS

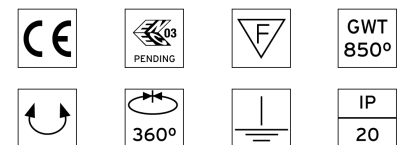

Solid Pure Ceiling/Wall Dali Version . Accessories

Optical



08.8768.14

Holding ring

Holding ring



● 08.8763.14

Honeycomb anti-glare screen


"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8766.64.OD

Blue filter

Blue filter



● 08.8766.65.OD

Sky blue filter

Sky blue filter



● 08.8766.66.OD

Amber filter

Amber filter



● 08.8766.67.OD

Red filter

Red filter




Solid Pure Ceiling/Wall Dali Version designed by Knud Holscher

Spotlight to be installed on ceiling/wall with LED light source. Integrated power supply 220-240V / 50-60Hz.

● 09.2883.30.DA - 3200lm White

● 09.2883.14.DA - 3200lm Black

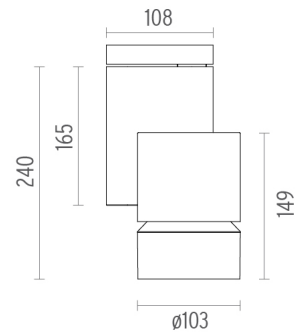

CERTIFICATIONS



Solid Pure Ceiling/Wall Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




Solid Pure Ceiling/Wall Dali Version
designed by Knud Holscher

Spotlight to be installed on ceiling/wall with LED light source. Integrated power supply 220-240V / 50-60Hz.

● 09.2883.30.DA - 3200lm White

● 09.2883.14.DA - 3200lm Black

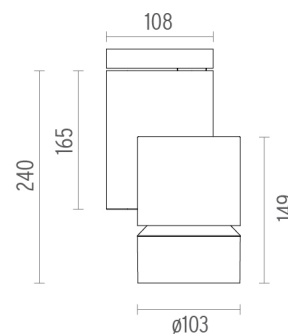

CERTIFICATIONS

