

SOLID PURE TRACK NO DIMMABLE

Number of heads

Design awards Red Dot Design Award Winner 2013

Mounting Three phase track

Lamps description LED Array 23W 2747 lm 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 220/240 Environment Indoor

OPTICAL


Light controller descriptionProtection glassAimingAdjustableLight distribution symmetrySymmetricBeam angle17° Medium

ELECTRICAL

Transformer availability Included
Transformer mounting Integral
Transformer type Electronic
Emergency Without
Insulation class Class I

PHYSICAL

Diameter (mm)S/NHeight (mm)239,5Spot diameter (mm)103Construction materialAluminiumWeight (kg)1,70

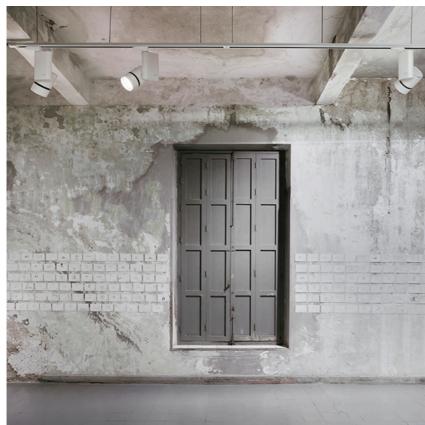




Solid Pure Track No Dimmable designed by Knud Holscher

Spotlight to be installed on 3-circuittrack with LED light source. Integrated power supply 220-240V / 50-60Hz.

09.2889.30 - 2274lm White 09.2889.14 - 2274lm Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



Solid Pure Track No Dimmable . Accessories

Optical







08.8768.14

Holding ring

Holding ring

08.8763.14

Honeycomb anti-glare screen

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.

08.8766.64.OD

Blue filter

Blue filter

Solid Pure Track No Dimmable designed by Knud Holscher

Spotlight to be installed on 3-circuittrack with LED light source. Integrated power supply 220-240V / 50-60Hz.

09.2889.30 - 2274lm White
09.2889.14 - 2274lm Black









08.8766.65.OD

Sky blue filter

Sky blue filter

08.8766.66.OD


Amber filter

Amber filter

08.8766.67.OD

Red filter

Red filter



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com



Solid Pure Track No Dimmable . Accessories

Mounting





60.3022.11

60.3023.11 60.3023.14 60.3023.29

Recessed box for fixpoint

Fix-point

Solid Pure Track No Dimmable . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



Solid Pure Track No Dimmable designed by Knud Holscher

Spotlight to be installed on 3-circuittrack with LED light source. Integrated power supply 220-240V / 50-60Hz.

09.2889.30 - 2274lm White 09.2889.14 - 2274lm Black



CERTIFICATIONS

















Flos.architectural@flos.com www.flos.com