

GIANO Ø100

Number of heads	1
Mounting	Wall recessed
Lamps description	Power LED 1W 77 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	100/240
Environment	Indoor, Outdoor

OPTICAL


Light controller description	Diffuser lens
Aiming	Fixed
Light distribution symmetry	Asymmetric
Beam angle	57°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL

Diameter (mm)	104
Recessed depth (mm)	77
Construction material	Die-cast aluminum
Weight (kg)	0,25




Giano Ø100

designed by Rodolfo Dordoni

Recessed guide light for indoor and outdoor applications. Non-regulable 100-240V, 50-60Hz power supply included.

09.3000.01B - 49lm	Matt white
09.3000.72B - 49lm	Grey
09.3000.04B - 49lm	Matt black
09.3000.MMB - 49lm	Dark brown

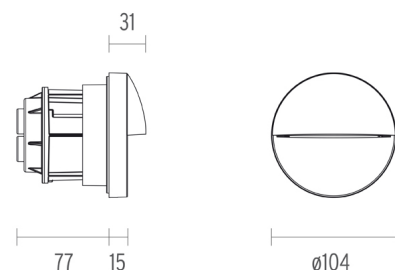

CERTIFICATIONS



Giano Ø100 . Accessories


Mounting



08.8261.00

Accessory for concrete installation

Accessory for concrete installation for Ø100.



Giano Ø100

designed by Rodolfo Dordoni

Recessed guide light for indoor and outdoor applications. Non-regulable 100-240V, 50-60Hz power supply included.

● 09.3000.01B - 49lm	Matt white
● 09.3000.72B - 49lm	Grey
● 09.3000.04B - 49lm	Matt black
● 09.3000.MMB - 49lm	Dark brown

Giano Ø100 . Lamps



Power LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Power LED

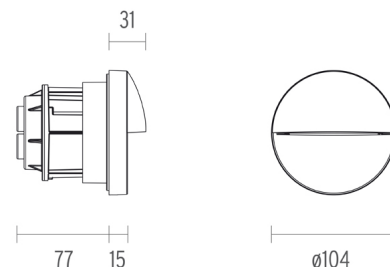

CERTIFICATIONS

