

DECOFIX ROUND 1L

| | |
|--------------------------------|---|
| Number of heads | 1 |
| Mounting | Ceiling recessed |
| Lamps description | LED Array DC 500 mA 9,2W 744 lm 2700K CRI 90 |
| Luminaire luminous flux | Extreme Cut-off. See reference number |
| Environment | Indoor |
| Notes | All versions have interchangeable screening cylinders in 3 colours: black, gold or silver, incorporated into the light fixture. |

OPTICAL


| | |
|------------------------------------|-----------|
| Aiming | Fixed |
| Light distribution symmetry | Symmetric |

ELECTRICAL

| | |
|---------------------------------|--|
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Transformer type | Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali |
| Emergency | Without |
| Insulation class | Class III |

PHYSICAL



| | |
|------------------------------|---------------|
| Cutout diameter (mm) | 90 |
| Diameter (mm) | 94 |
| Recessed depth (mm) | 126 |
| Construction material | Thermoplastic |
| Weight (kg) | 0,45 |

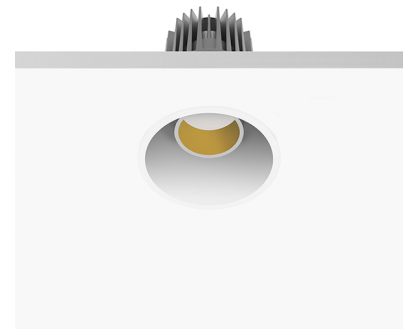


Decofix Round 1L
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

- 09.3111.30A - 36° - 439lm White
- 09.3111.14A - 39° - 407lm Black

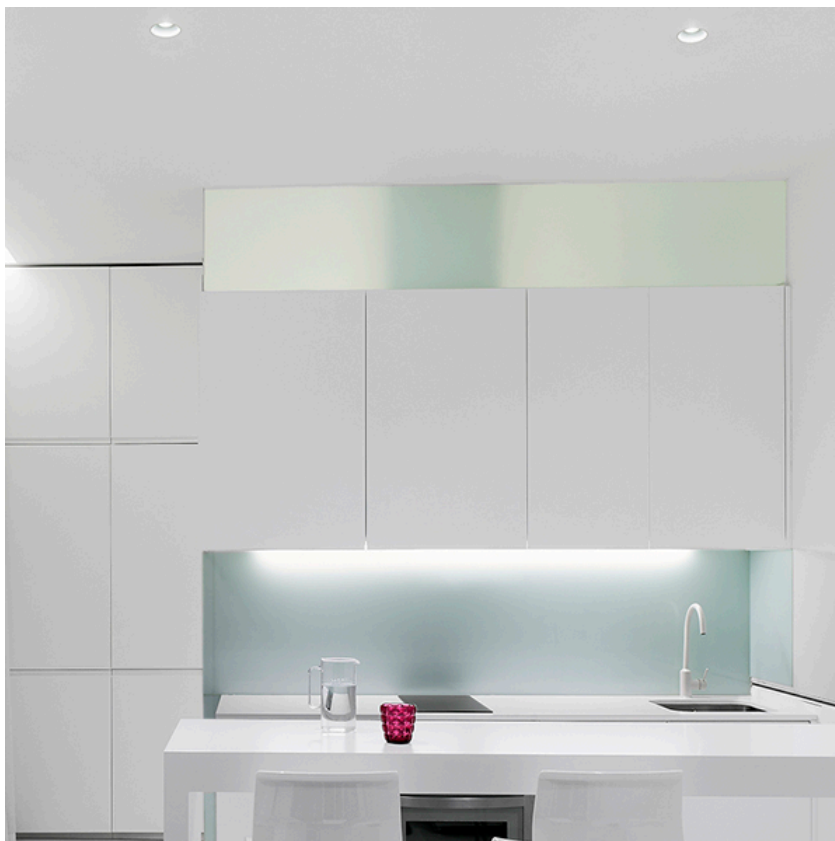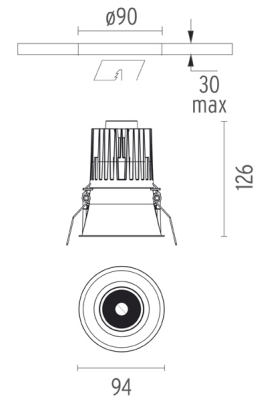

CERTIFICATIONS

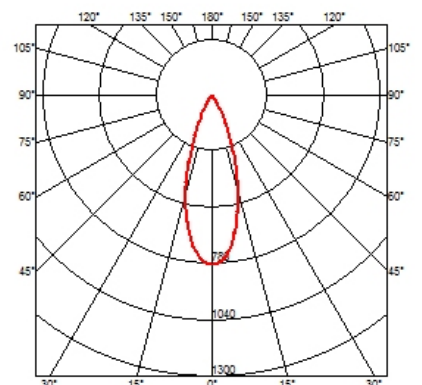

Decofix Round IL . Accessories

Power Supply



60.8650

Constant Current Power Supply for LED. 20W / 500 mA

Non dimmable continuous current power supply 220/240V - 50/60Hz. (110V = 12W)

Maximum length of 1.5 mm² secondary conductor (m): 50

Maximum length of 2.5 mm² secondary conductor (m): 50



60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8533

Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15




60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15

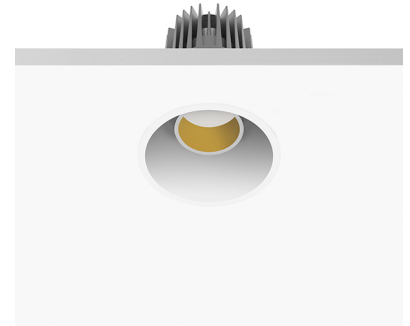


Decofix Round IL designed by FLOS Architectural


Recessed luminaire with LED light source. Power supply not included.

09.3111.30A - 36° - 439lm White

09.3111.14A - 39° - 407lm Black

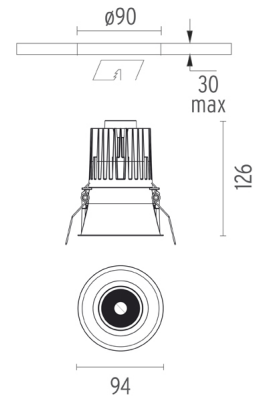

CERTIFICATIONS

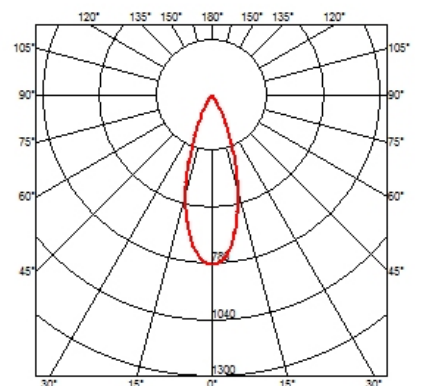

Decofix Round IL . Lamps




LED Array

Lamp category:
LED

Socket:
Special base

Lamp type:
LED Array

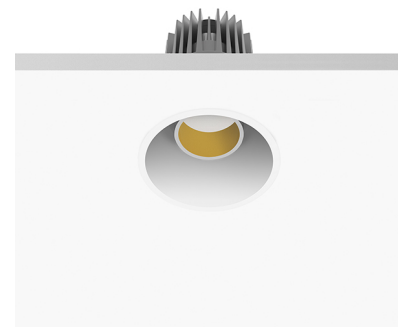


Decofix Round IL
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

● 09.3111.30A - 36° - 439lm White

● 09.3111.14A - 39° - 407lm Black

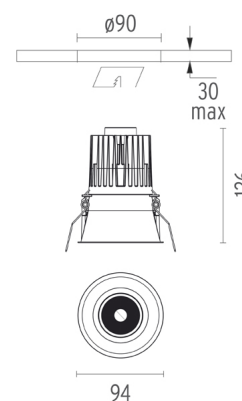

CERTIFICATIONS

