

THEBLOCKOFLIGHT

Number of heads	1
Mounting	Wall recessed
Lamps description	Power LED 2,2W 154 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	100/240
Environment	Indoor, Outdoor

OPTICAL


Aiming	Fixed
Light distribution symmetry	Asymmetric

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL


Width (mm)	75
Height (mm)	150
Recessed depth (mm)	47
Construction material	Aluminium
Weight (kg)	0,40

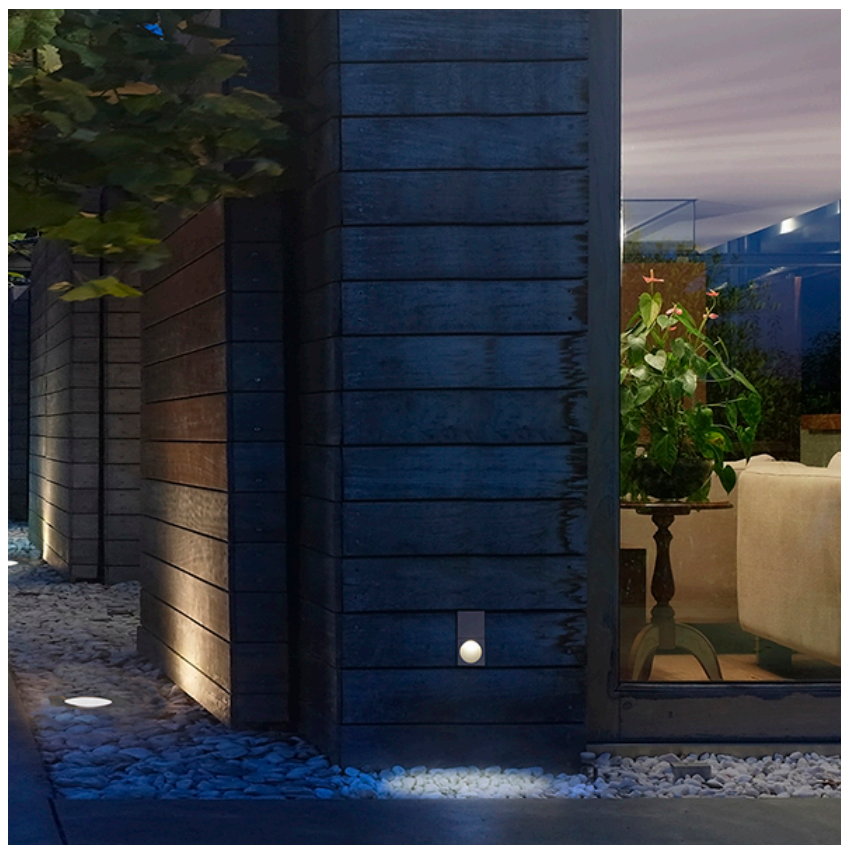



Theblockoflight
designed by Knud Holscher

Semi-embedded signalling lamp for indoor or outdoor use. Non-regulable 100-240V, 50-60Hz power supply and 500 mm power cable included.

- 09.3310.01B - 46° - 70lm Matt white
- 09.3310.72B - 46° - 43lm Grey
- 09.3310.04B - 42° - 33lm Matt black

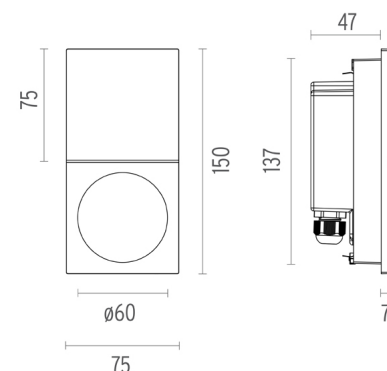

CERTIFICATIONS

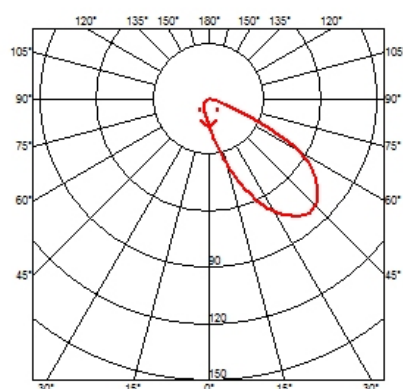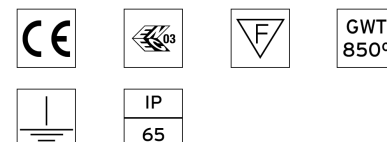

Theblockofflight . Accessories

Mounting



08.8423.00

Can for embedding in concrete.

Can for embedding in concrete.



Theblockofflight
designed by Knud Holscher

Semi-embedded signalling lamp for indoor or outdoor use. Non-regulable 100-240V, 50-60Hz power supply and 500 mm power cable included.

- 09.3310.01B - 46° - 70lm Matt white
- 09.3310.72B - 46° - 43lm Grey
- 09.3310.04B - 42° - 33lm Matt black

Theblockofflight . Lamps



Power LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Power LED

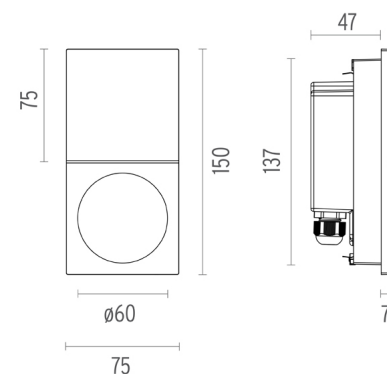

CERTIFICATIONS

