

## LED PIPES RECESSED 4L

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 10W 850 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	24
<b>Environment</b>	Indoor
<b>Notes</b>	Screening cylinder incorporated into the product to cover the external part of the "pipe" and improve visual comfort

### OPTICAL


<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	19°, 20°

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Cutout length (mm)</b>	108
<b>Cutout width (mm)</b>	108
<b>Recessed depth (mm)</b>	85
<b>Construction material</b>	Plastic
<b>Weight (kg)</b>	0,43

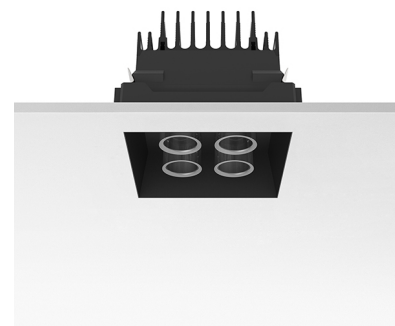



**LED Pipes Recessed 4L**  
designed by FLOS Architectural

Embedded luminaire for LED light source. Power supply not included.

● 09.3400.14A - 324lm	Transparent
● 09.3401.14A - 324lm	Amber
● 09.3402.14A - 324lm	Violet

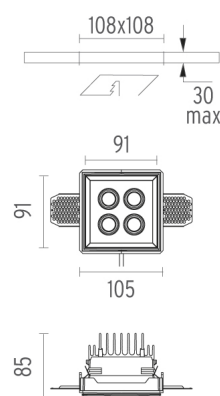

### CERTIFICATIONS

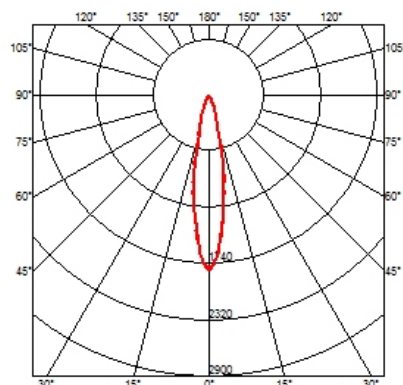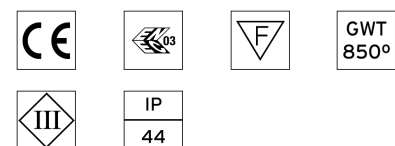

## LED Pipes Recessed 4L . Accessories

### Power Supply



60.8495

#### Electronic transformer with constant voltage (24V) for LED. 20W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5



60.8496

#### Electronic transformer with constant voltage (24V) for LED. 60W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5




60.8497

#### Electronic transformer with constant voltage (24V) for LED. 100W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5

Maximum lenght of 2.5 mm2 secondary conductor (m): 10

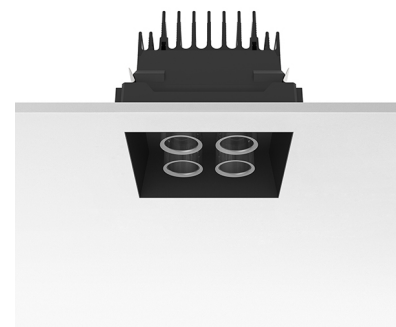


### LED Pipes Recessed 4L designed by FLOS Architectural

Embedded luminaire for LED light source. Power supply not included.

09.3400.14A - 324lm	Transparent
09.3401.14A - 324lm	Amber
09.3402.14A - 324lm	Violet


### Mounting




08.8504.00

#### Installation frame

Installation frame 105x105 mm

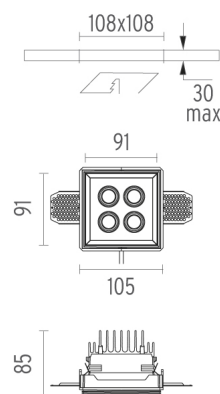

### CERTIFICATIONS

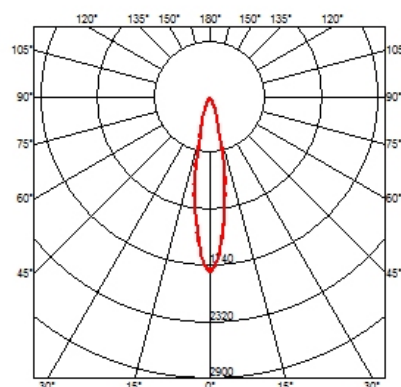

## LED Pipes Recessed 4L . Lamps




### Power LED

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Power LED

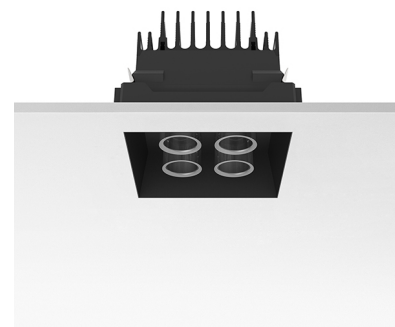

### LED Pipes Recessed 4L designed by FLOS Architectural

Embedded luminaire for LED light source. Power supply not included.

09.3400.14A - 324lm	Transparent
09.3401.14A - 324lm	Amber
09.3402.14A - 324lm	Violet

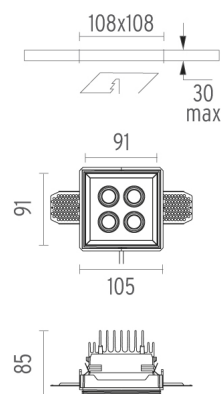

### CERTIFICATIONS

