

UT SPOT TRACK Ø86 ON BOARD DIMMER INCLUDED

Number of heads	1
Mounting	Track mounting
Lamps description	Phosphor LED 34,1W 3000 lm 3000K CRI 98
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.



OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	16° Spot

UT Spot Track Ø86 On Board Dimmer Included

designed by FLOS Architectural

<div>Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.</div>


ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class II


● 09.4243.30 - 1822lm	White
● 09.4243.14 - 1822lm	Black

PHYSICAL

Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,36

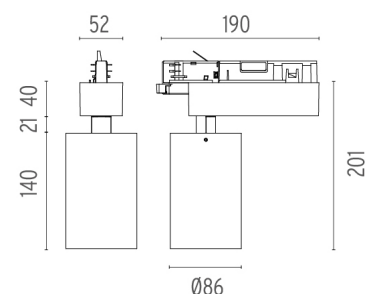

CERTIFICATIONS

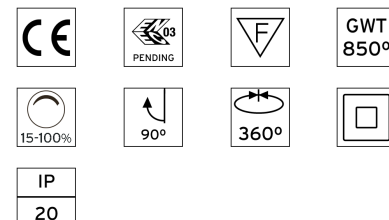

UT Spot Track Ø86 On Board Dimmer Included . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light



08.8160.CL

Cold light filter

Cold light filter




UT Spot Track Ø86 On Board Dimmer Included


designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.


- 09.4243.30 - 1822lm White
- 09.4243.14 - 1822lm Black

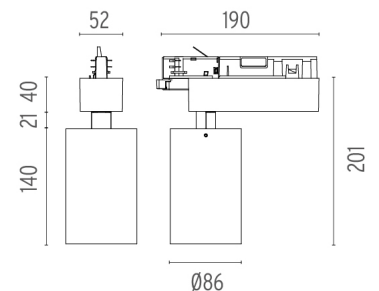

CERTIFICATIONS

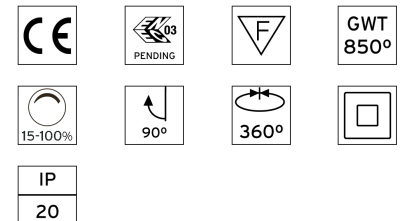


UT Spot Track Ø86 On Board Dimmer Included . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



○ 08.8175.68

Flood lens

Flood lens made in press glass.



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

Holding ring

Holding ring



● 08.8411.00

Screening crosspiece




UT Spot Track Ø86 On Board Dimmer Included


designed by FLOS Architectural

<div>Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.</div>

- 09.4243.30 - 1822lm White
- 09.4243.14 - 1822lm Black

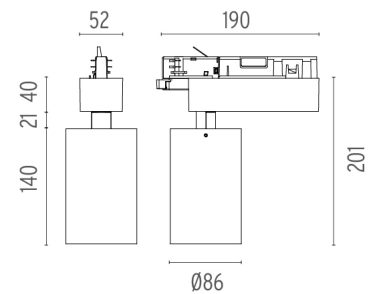

CERTIFICATIONS

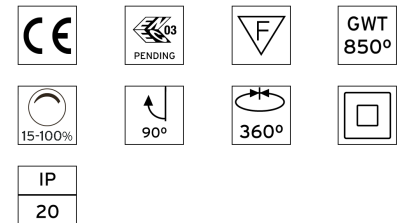

UT Spot Track Ø86 On Board Dimmer Included . Lamps



Phosphor LED

Lamp category:
LED

Lamp type:
Phosphor LED




UT Spot Track Ø86 On Board Dimmer Included

designed by FLOS Architectural

<div>Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.</div>

- 09.4243.30 - 1822lm White
- 09.4243.14 - 1822lm Black

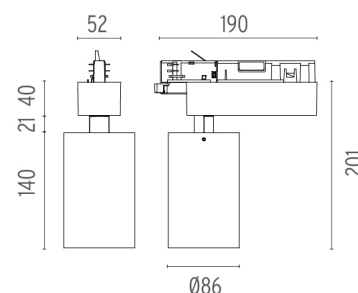

CERTIFICATIONS

