

## UT SPOT TRACK Ø86 ON BOARD DIMMER INCLUDED

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Phosphor LED 29,3W 3000 lm 4000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.

### OPTICAL

<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	32° Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic dimmable
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Spot diameter (mm)</b>	86
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,36




### UT Spot Track Ø86 On Board Dimmer Included

designed by FLOS Architectural



Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

● 09.4252.30 - 1947lm	White
● 09.4252.14 - 1947lm	Black

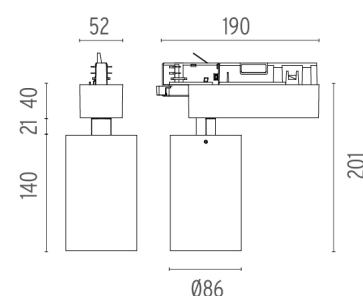

Flos.architectural@flos.com

### CERTIFICATIONS

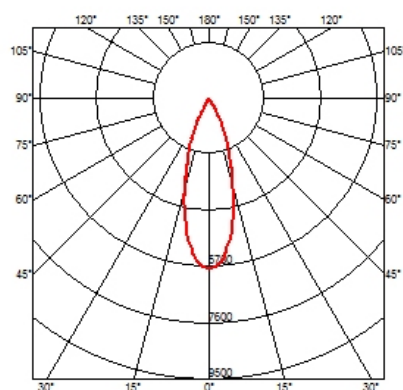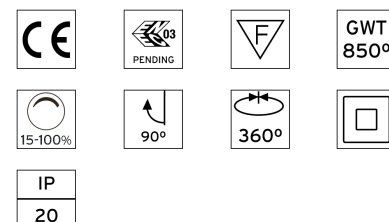

## UT Spot Track Ø86 On Board Dimmer Included . Accessories


### Optical



08.8163.68

#### Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

#### Blue filter


Blue filter



08.8160.65.OD

#### Sky blue filter


Sky blue filter



08.8160.66.OD

#### Amber filter

Amber filter



08.8160.67.OD

#### Red filter

Red filter



08.8160.98.OD

#### U.V. filter

U.V. filter



08.8160.68

#### I.R. filter


I.R. filter



08.8160.69

#### Hot Light

Hot Light



08.8160.CL

#### Cold light filter

Cold light filter




### UT Spot Track Ø86 On Board Dimmer Included



designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.


- 09.4252.30 - 1947lm White
- 09.4252.14 - 1947lm Black

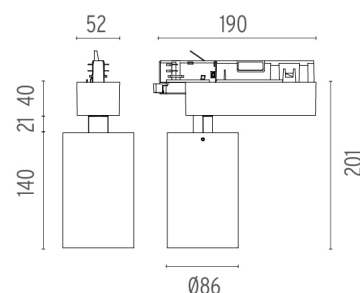

### CERTIFICATIONS

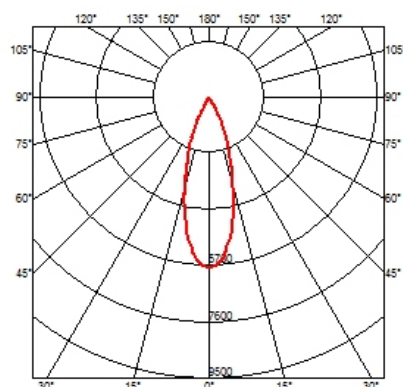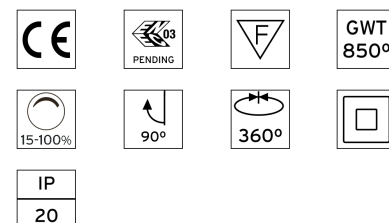

## UT Spot Track Ø86 On Board Dimmer Included . Accessories



08.8160.DL

### Daylight filter

Daylight filter



08.8160.ND

### Neodimium



08.8175.68

### Flood lens

Flood lens made in press glass.



08.8495.14

### Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



08.8410.00

### Holding ring

Holding ring



08.8411.00

### Screening crosspiece




### UT Spot Track Ø86 On Board Dimmer Included


designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

09.4252.30 - 1947lm White  
09.4252.14 - 1947lm Black

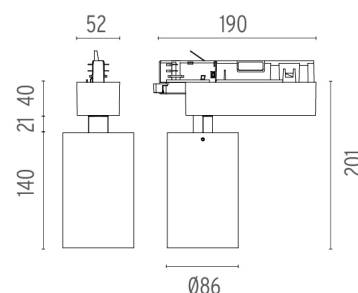

## CERTIFICATIONS

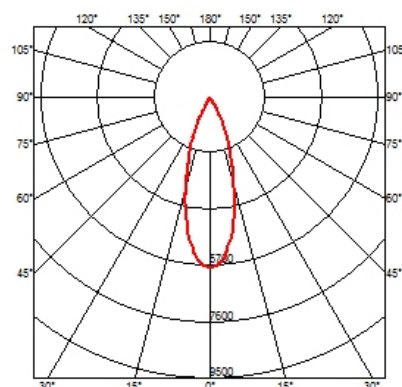

## UT Spot Track Ø86 On Board Dimmer Included . Lamps



### Phosphor LED

**Lamp category:**  
LED

**Lamp type:**  
Phosphor LED




### UT Spot Track Ø86 On Board Dimmer Included

designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.  
220-240V, 50-60Hz power supply integrated.

● 09.4252.30 - 1947lm	White
● 09.4252.14 - 1947lm	Black

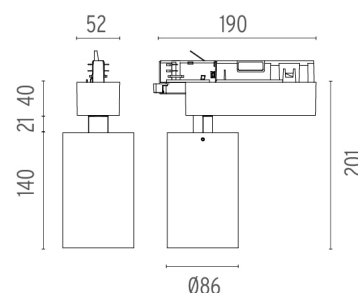

### CERTIFICATIONS

