

UT SPOT CEILING Ø86 DALI VERSION

| | |
|--------------------------------|---|
| Number of heads | 1 |
| Mounting | Ceiling surface |
| Lamps description | Phosphor LED 34,1W 3000 lm 3000K CRI 98 |
| Luminaire luminous flux | See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |

OPTICAL

| | |
|------------------------------------|------------|
| Reflector finish | Aluminum |
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 16° Spot |

ELECTRICAL

| | |
|---------------------------------|--------------------------|
| Transformer availability | Included |
| Transformer mounting | Remote |
| Transformer type | Electronic dimmable dali |
| Emergency | Without |
| Insulation class | Class II |

PHYSICAL


| | |
|------------------------------|-----------|
| Cutout diameter (mm) | 85 |
| Recessed depth (mm) | 62 |
| Spot diameter (mm) | 86 |
| Construction material | Aluminium |
| Weight (kg) | 1,36 |




UT Spot Ceiling Ø86 Dali Version
designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4263.30.DA - 1822lm White
- 09.4263.14.DA - 1822lm Black



CERTIFICATIONS

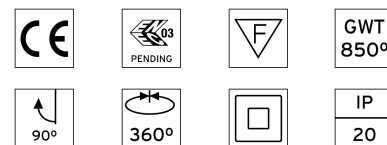

UT Spot Ceiling Ø86 Dali Version . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light



08.8160.CL

Cold light filter

Cold light filter




UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

09.4263.30.DA - 1822lm White


09.4263.14.DA - 1822lm Black



CERTIFICATIONS




UT Spot Ceiling Ø86 Dali Version . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



○ 08.8175.68

Flood lens

Flood lens made in press glass.



UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4263.30.DA - 1822lm White

● 09.4263.14.DA - 1822lm Black



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00


Holding ring

Holding ring



● 08.8411.00


Screening crosspiece



CERTIFICATIONS



UT Spot Ceiling Ø86 Dali Version . Lamps



Phosphor LED

Lamp category:
LED

Lamp type:
Phosphor LED




UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4263.30.DA - 1822lm White

● 09.4263.14.DA - 1822lm Black



CERTIFICATIONS

