

UT SPOT CEILING Ø86 DALI VERSION

Number of heads	1
Mounting	Ceiling surface
Lamps description	Phosphor LED 34,1W 3000 lm 3000K CRI 98
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	85
Recessed depth (mm)	62
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,36




UT Spot Ceiling Ø86 Dali Version
designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4264.30.DA - 1830lm White
- 09.4264.14.DA - 1830lm Black



CERTIFICATIONS

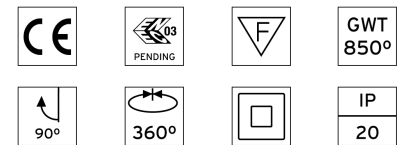

UT Spot Ceiling Ø86 Dali Version . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light



08.8160.CL

Cold light filter

Cold light filter




UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

09.4264.30.DA - 1830lm White


09.4264.14.DA - 1830lm Black



CERTIFICATIONS




UT Spot Ceiling Ø86 Dali Version . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodymium



○ 08.8175.68

Flood lens

Flood lens made in press glass.



UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4264.30.DA - 1830lm White

● 09.4264.14.DA - 1830lm Black



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00


Holding ring

Holding ring



● 08.8411.00

Screening crosspiece



CERTIFICATIONS



UT Spot Ceiling Ø86 Dali Version . Lamps



Phosphor LED

Lamp category:
LED


Lamp type:
Phosphor LED



UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4264.30.DA - 1830lm White
- 09.4264.14.DA - 1830lm Black



CERTIFICATIONS

