

UT SPOT CEILING Ø86

| | |
|--------------------------------|---|
| Number of heads | 1 |
| Mounting | Ceiling surface |
| Lamps description | Phosphor LED 29,3W 3000 lm 4000K CRI 80 |
| Luminaire luminous flux | See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |

OPTICAL

| | |
|------------------------------------|------------|
| Reflector finish | Aluminum |
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 17° Spot |

ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer availability | Included |
| Transformer mounting | Remote |
| Transformer type | Electronic |
| Emergency | Without |
| Insulation class | Class II |

PHYSICAL


| | |
|------------------------------|-----------|
| Cutout diameter (mm) | 85 |
| Recessed depth (mm) | 62 |
| Spot diameter (mm) | 86 |
| Construction material | Aluminium |
| Weight (kg) | 1,36 |





UT Spot Ceiling Ø86
designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

| | |
|-----------------------|-------|
| ● 09.4270.30 - 2216lm | White |
| ● 09.4270.14 - 2216lm | Black |



CERTIFICATIONS

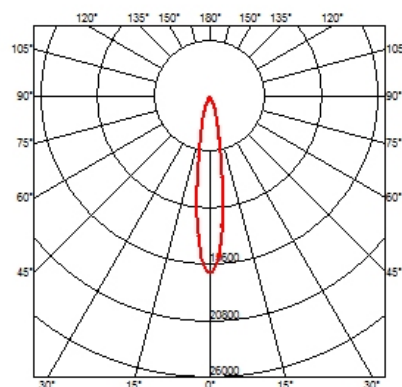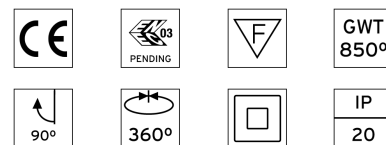

UT Spot Ceiling Ø86 . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter

Blue filter



08.8160.65.OD

Sky blue filter

Sky blue filter




UT Spot Ceiling Ø86

designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

09.4270.30 - 2216lm White


09.4270.14 - 2216lm Black



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter


Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light




08.8160.CL


Cold light filter

Cold light filter

CERTIFICATIONS

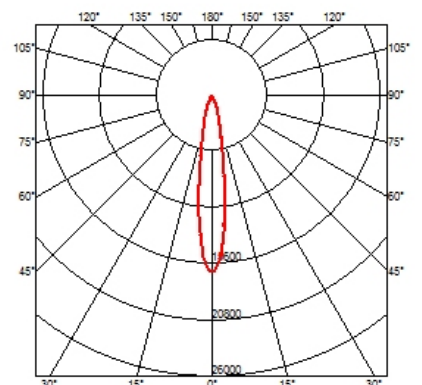


UT Spot Ceiling Ø86 . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodymium



○ 08.8175.68

Flood lens

Flood lens made in press glass.



UT Spot Ceiling Ø86

designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4270.30 - 2216lm White

● 09.4270.14 - 2216lm Black



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00


Holding ring

Holding ring




● 08.8411.00

Screening crosspiece



CERTIFICATIONS

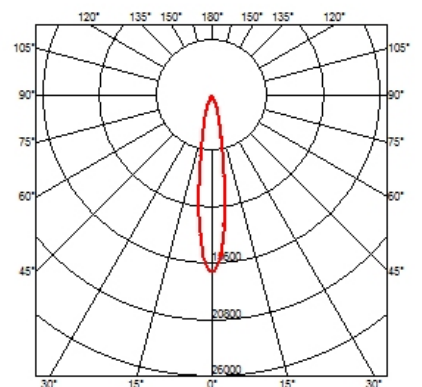

UT Spot Ceiling Ø86 . Lamps



Phosphor LED

Lamp category:
LED

Lamp type:
Phosphor LED




UT Spot Ceiling Ø86

designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4270.30 - 2216lm White
- 09.4270.14 - 2216lm Black



CERTIFICATIONS

