

## UT SPOT CEILING Ø86 DALI VERSION

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling surface
<b>Lamps description</b>	Phosphor LED 29,3W 3000 lm 4000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor

### OPTICAL

<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	24° Medium

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	85
<b>Recessed depth (mm)</b>	62
<b>Spot diameter (mm)</b>	86
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,36





**UT Spot Ceiling Ø86 Dali Version**  
designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4271.30.DA - 2178lm White
- 09.4271.14.DA - 2178lm Black

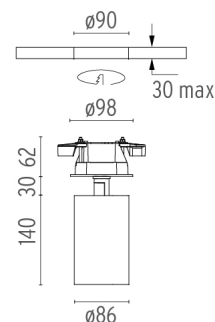

### CERTIFICATIONS

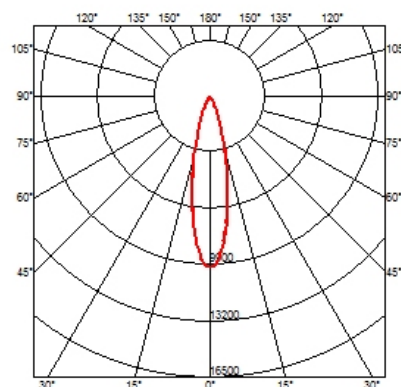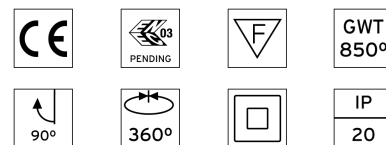

## UT Spot Ceiling Ø86 Dali Version . Accessories


### Optical



08.8163.68

#### Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

#### Blue filter

Blue filter



08.8160.65.OD

#### Sky blue filter

Sky blue filter




#### UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

09.4271.30.DA - 2178lm White


09.4271.14.DA - 2178lm Black



08.8160.66.OD

#### Amber filter

Amber filter



08.8160.67.OD

#### Red filter


Red filter



08.8160.98.OD

#### U.V. filter

U.V. filter



08.8160.68

#### I.R. filter


I.R. filter



08.8160.69

#### Hot Light

Hot Light




08.8160.CL


#### Cold light filter

Cold light filter

### CERTIFICATIONS

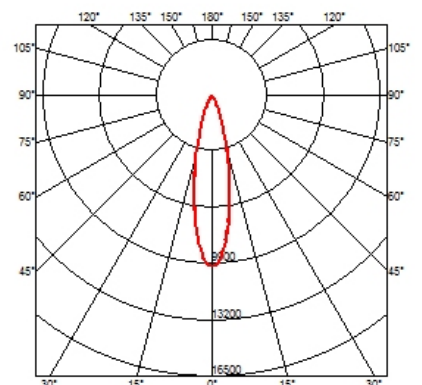


## UT Spot Ceiling Ø86 Dali Version . Accessories



08.8160.DL

### Daylight filter

Daylight filter



08.8160.ND

### Neodimium



○ 08.8175.68

### Flood lens

Flood lens made in press glass.



### UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4271.30.DA - 2178lm White

● 09.4271.14.DA - 2178lm Black



● 08.8495.14

### Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00


### Holding ring

Holding ring




● 08.8411.00

### Screening crosspiece



### CERTIFICATIONS

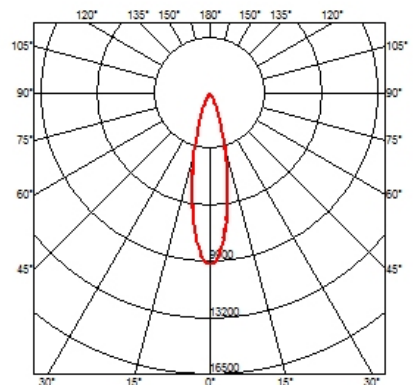

## UT Spot Ceiling Ø86 Dali Version . Lamps



**Phosphor LED**

**Lamp category:**  
LED

**Lamp type:**  
Phosphor LED




**UT Spot Ceiling Ø86 Dali Version**  
designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4271.30.DA - 2178lm White

● 09.4271.14.DA - 2178lm Black



### CERTIFICATIONS

