

UT SPOT CEILING Ø86

Number of heads	1
Mounting	Ceiling surface
Lamps description	Phosphor LED 29,3W 3000 lm 4000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	32° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	85
Recessed depth (mm)	62
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,36





UT Spot Ceiling Ø86 designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4272.30 - 1947lm	White
● 09.4272.14 - 1947lm	Black



CERTIFICATIONS

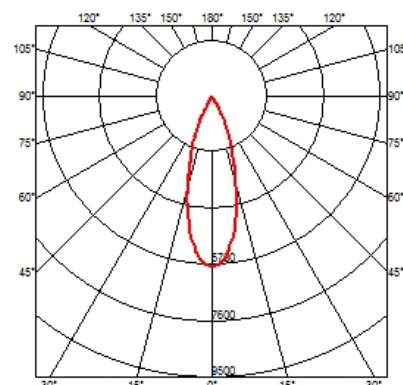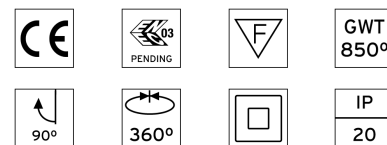

UT Spot Ceiling Ø86 . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light



08.8160.CL

Cold light filter

Cold light filter




UT Spot Ceiling Ø86



designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.


- 09.4272.30 - 1947lm White
- 09.4272.14 - 1947lm Black



CERTIFICATIONS

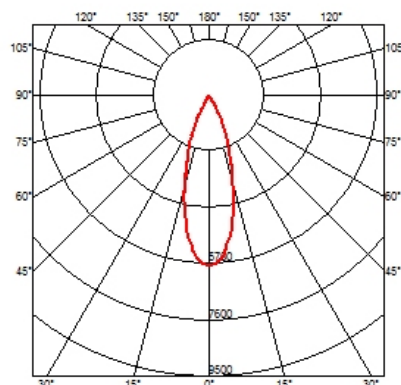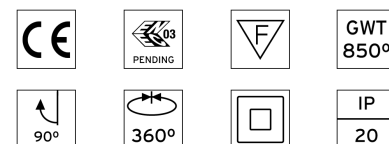

UT Spot Ceiling Ø86 . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



UT Spot Ceiling Ø86

designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4272.30 - 1947lm White
- 09.4272.14 - 1947lm Black



08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



08.8410.00


Holding ring

Holding ring




08.8411.00

Screening crosspiece



CERTIFICATIONS

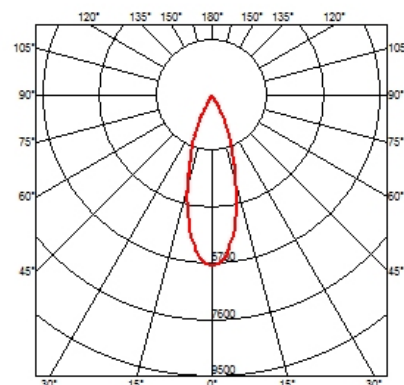

UT Spot Ceiling Ø86 . Lamps



Phosphor LED

Lamp category:
LED

Lamp type:
Phosphor LED




UT Spot Ceiling Ø86

designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4272.30 - 1947lm	White
● 09.4272.14 - 1947lm	Black



CERTIFICATIONS

