

UT SPOT TRACK Ø86

Number of heads	1
Mounting	Track mounting
Lamps description	Phosphor LED 34,1W 3000 lm 3000K CRI 98
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL


Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,36





UT Spot Track Ø86 designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

● 09.4287.30 - 1830lm	White
● 09.4287.14 - 1830lm	Black

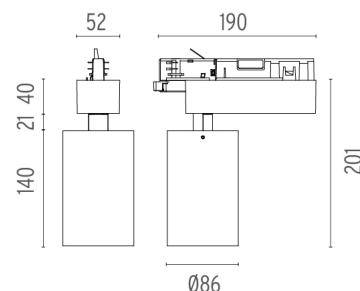

CERTIFICATIONS

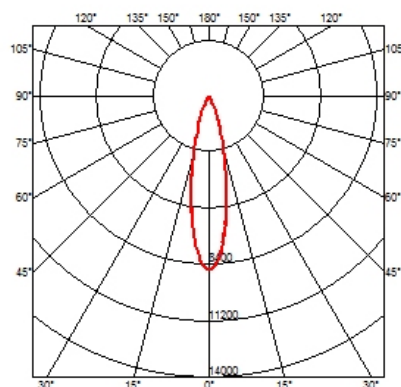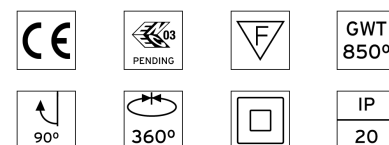

UT Spot Track Ø86 . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light



08.8160.CL

Cold light filter


Cold light filter





UT Spot Track Ø86 designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.
220-240V, 50-60Hz power supply integrated.


- 09.4287.30 - 1830lm White
- 09.4287.14 - 1830lm Black

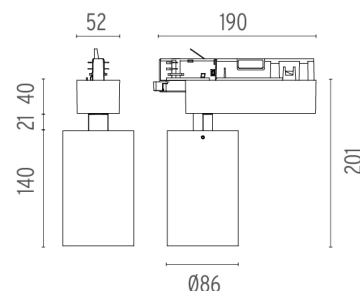

CERTIFICATIONS

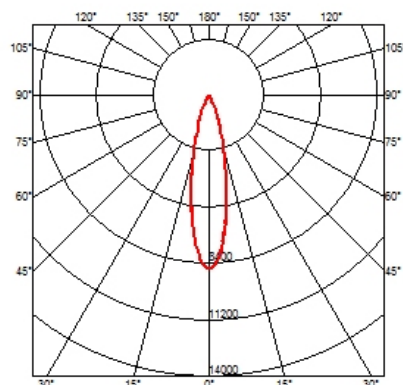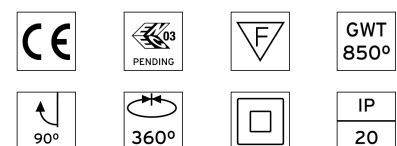

UT Spot Track Ø86 . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



08.8410.00

Holding ring

Holding ring



08.8411.00


Screening crosspiece





UT Spot Track Ø86 designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.
220-240V, 50-60Hz power supply integrated.

- 09.4287.30 - 1830lm White
- 09.4287.14 - 1830lm Black

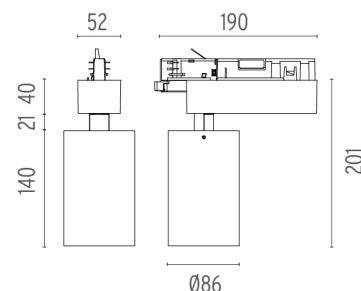

CERTIFICATIONS

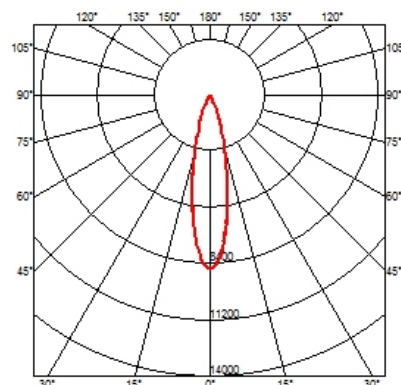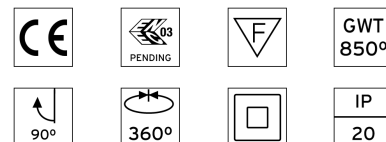

UT Spot Track Ø86 . Lamps



Phosphor LED

Lamp category:
LED


Lamp type:
Phosphor LED



UT Spot Track Ø86 designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.
220-240V, 50-60Hz power supply integrated.

● 09.4287.30 - 1830lm	White
● 09.4287.14 - 1830lm	Black

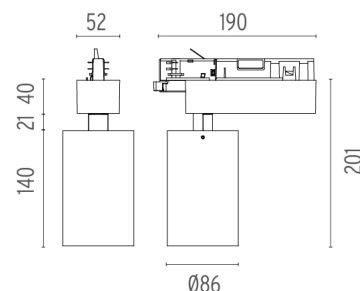

CERTIFICATIONS

