

UT SPOT TRACK Ø57 DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 22W 2500 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.



UT Spot Track Ø57 Dali Version designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4442.30ADA - 2146lm White
- 09.4442.14ADA - 2146lm Black

OPTICAL


Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	39° Flood

ELECTRICAL


Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL

Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	0,57



CERTIFICATIONS

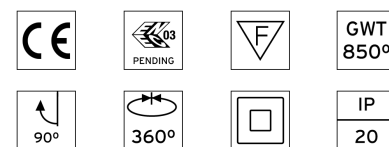

UT Spot Track Ø57 Dali Version . Accessories

Optical



● 08.8429.00

Screening Crosspiece



○ 08.8431.00

Elliptical Lens



○ 08.8432.00

Flood Lens



● 08.8428.00

Honeycomb



● 08.0526.00

Snoot Shielding Cone




UT Spot Track Ø57 Dali Version designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

○ 09.4442.30ADA - 2146lm White

● 09.4442.14ADA - 2146lm Black



CERTIFICATIONS



UT Spot Track Ø57 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Spot Track Ø57 Dali Version
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

● 09.4442.30ADA - 2146lm White

● 09.4442.14ADA - 2146lm Black



CERTIFICATIONS

