

UT SPOT TRACK Ø57 DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 22W 2080 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. Gli apparecchi FLOS per binario trifase sono progettati e testati con i binari raccomandati da FLOS. La compatibilità è garantita con i binari prodotti da Nordic Aluminium. Compatibilità con Eutrac su richiesta. Gli apparecchi FLOS per binario trifase DALI sono progettati in conformità al protocollo Pulse DALI di Nordic Aluminium.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL


Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	0,57





UT Spot Track Ø57 Dali Version
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4444.30ADA - 1471lm White
- 09.4444.14ADA - 1471lm Black



CERTIFICATIONS

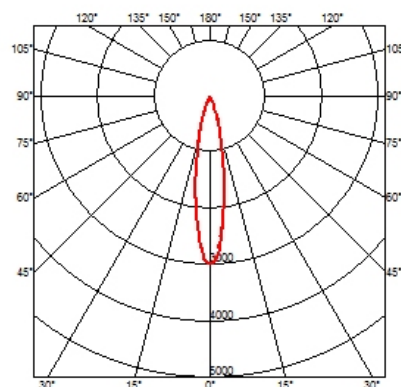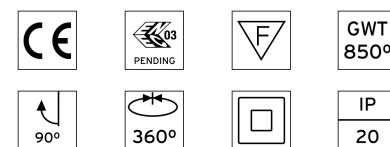

UT Spot Track Ø57 Dali Version . Accessories

Optical



● 08.8429.00
Screening Crosspiece



○ 08.8431.00
Elliptical Lens



○ 08.8432.00
Flood Lens



● 08.8428.00
Honeycomb



● 08.0526.00
Snoot Shielding Cone




UT Spot Track Ø57 Dali Version
designed by FLOS Architectural



Spotlight to be installed on 3-phase track, with LED light source.
220-240V, 50-60Hz power supply integrated.

○ 09.4444.30ADA - 1471lm White

● 09.4444.14ADA - 1471lm Black



CERTIFICATIONS

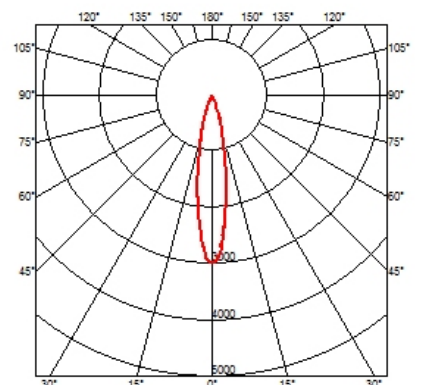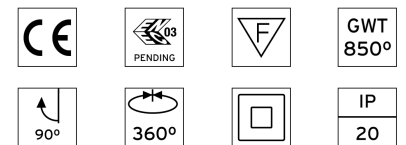

UT Spot Track Ø57 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Spot Track Ø57 Dali Version
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.
220-240V, 50-60Hz power supply integrated.

● 09.4444.30ADA - 1471lm White

● 09.4444.14ADA - 1471lm Black



CERTIFICATIONS

