

## UT SPOT TRACK Ø57 DALI VERSION

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	LED Array 22W 2150 lm 4000K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.



### UT Spot Track Ø57 Dali Version designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4451.30ADA - 1533lm White
- 09.4451.14ADA - 1533lm Black

### OPTICAL


<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	23° Medium

### ELECTRICAL


<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Spot diameter (mm)</b>	57
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,57



### CERTIFICATIONS

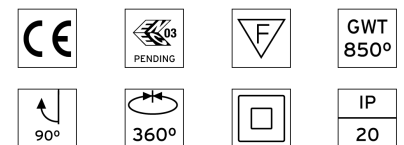

## UT Spot Track Ø57 Dali Version . Accessories

### Optical



● 08.8429.00

**Screening Crosspiece**



○ 08.8431.00

**Elliptical Lens**



○ 08.8432.00

**Flood Lens**



● 08.8428.00

**Honeycomb**



● 08.0526.00

**Snoot Shielding Cone**




**UT Spot Track Ø57 Dali Version**  
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.  
220-240V, 50-60Hz power supply integrated.

○ 09.4451.30ADA - 1533lm White

● 09.4451.14ADA - 1533lm Black



### CERTIFICATIONS



## UT Spot Track Ø57 Dali Version . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**

LED Array




**UT Spot Track Ø57 Dali Version**  
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.  
220-240V, 50-60Hz power supply integrated.

● 09.4451.30ADA - 1533lm White

● 09.4451.14ADA - 1533lm Black



**CERTIFICATIONS**

