

UT SPOT CEILING Ø57

Number of heads	1
Mounting	Ceiling surface
Lamps description	LED Array 21,5W 2500 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time.



OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	13° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	90
Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	0,83

UT Spot Ceiling Ø57


designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4460.30A - 2007lm White
- 09.4460.14A - 2007lm Black



CERTIFICATIONS

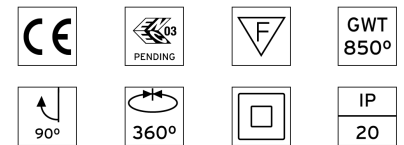

UT Spot Ceiling Ø57 . Accessories

Optical



● 08.8429.00

Screening Crosspiece



○ 08.8431.00

Elliptical Lens



○ 08.8432.00

Flood Lens



● 08.8428.00

Honeycomb



● 08.0526.00

Snoot Shielding Cone




UT Spot Ceiling Ø57 designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

○ 09.4460.30A - 2007lm White

● 09.4460.14A - 2007lm Black



CERTIFICATIONS



UT Spot Ceiling Ø57 . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Spot Ceiling Ø57

designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4460.30A - 2007lm White
- 09.4460.14A - 2007lm Black



CERTIFICATIONS

