

UT SPOT CEILING Ø57 DALI VERSION

Number of heads	1
Mounting	Ceiling surface
Lamps description	LED Array 21,5W 2080 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time.



OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	13° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II


PHYSICAL

Cutout diameter (mm)	90
Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	0,83


UT Spot Ceiling Ø57 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4463.30ADA - 1659lm White
- 09.4463.14ADA - 1659lm Black



CERTIFICATIONS

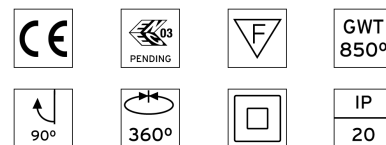

UT Spot Ceiling Ø57 Dali Version . Accessories

Optical



08.8429.00

Screening Crosspiece



08.8431.00

Elliptical Lens



08.8432.00

Flood Lens



08.8428.00

Honeycomb



08.0526.00

Snoot Shielding Cone



UT Spot Ceiling Ø57 Dali Version designed by FLOS Architectural


Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.



09.4463.30ADA - 1659lm White



09.4463.14ADA - 1659lm Black



CERTIFICATIONS



UT Spot Ceiling Ø57 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Spot Ceiling Ø57 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4463.30ADA - 1659lm White

● 09.4463.14ADA - 1659lm Black



CERTIFICATIONS

