FLOS

UT SPOT CEILING Ø57

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment Notes I Ceiling surface LED Array 21,5W 2150 Im 4000K CRI 90 See reference number 220/240 Indoor Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	39° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Cutout diameter (mm) Spot diameter (mm) Construction material Weight (kg) 90 57 Aluminium 0,83







UT Spot Ceiling Ø57 designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.






CERTIFICATIONS



FLOS

UT Spot Ceiling Ø57 . Accessories

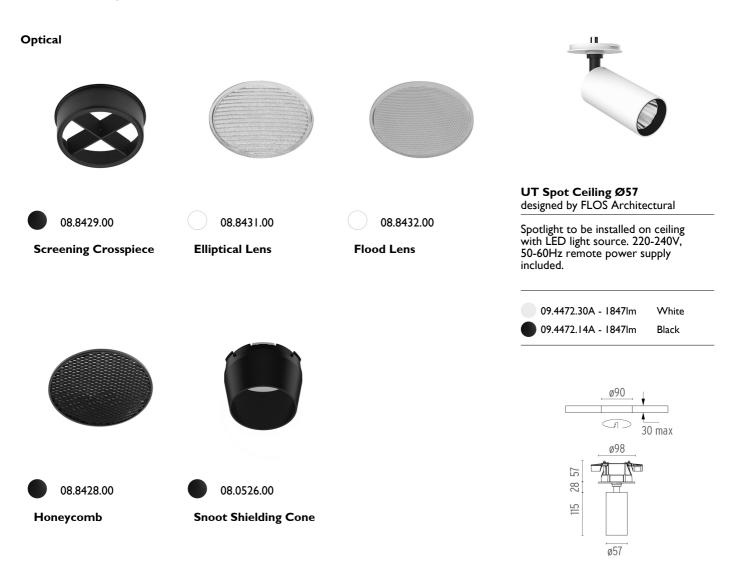

CERTIFICATIONS

Image: Certification of the state o



UT Spot Ceiling Ø57 . Lamps



LED Array LED Socket: Special base Lamp type: LED Array



UT Spot Ceiling Ø57 designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.



