

## UT SPOT TRACK Ø57

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	LED Array 21,5W 2080 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.



**UT Spot Track Ø57**  
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4486.30A - 1658lm White
- 09.4486.14A - 1658lm Black

### OPTICAL


<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	13° Spot

### ELECTRICAL



<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Spot diameter (mm)</b>	57
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,57



### CERTIFICATIONS

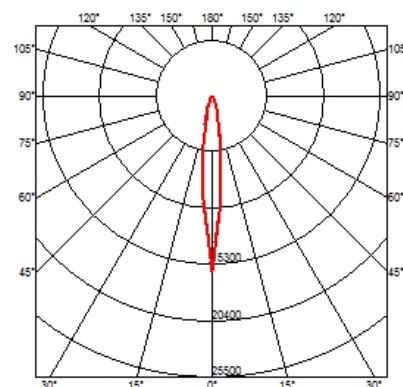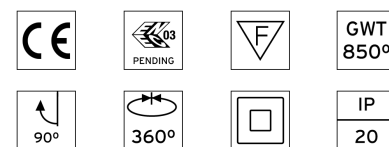

## UT Spot Track Ø57 . Accessories

### Optical



● 08.8429.00  
**Screening Crosspiece**



○ 08.8431.00  
**Elliptical Lens**



○ 08.8432.00  
**Flood Lens**



● 08.8428.00  
**Honeycomb**




● 08.0526.00  
**Snoot Shielding Cone**





**UT Spot Track Ø57**  
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.  
220-240V, 50-60Hz power supply integrated.

- 09.4486.30A - 1658lm White
- 09.4486.14A - 1658lm Black



### CERTIFICATIONS

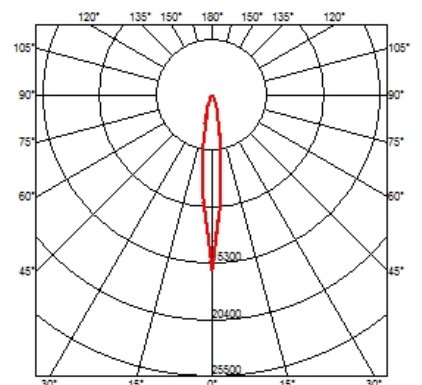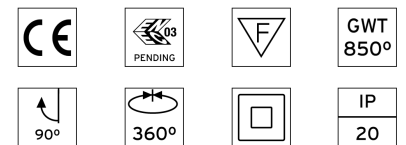

## UT Spot Track Ø57 . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**

LED Array




**UT Spot Track Ø57**

designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4486.30A - 1658lm    White
- 09.4486.14A - 1658lm    Black



**CERTIFICATIONS**