

## UT DOWNLIGHT TRIM Ø57 NON DIMMABLE

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array 18W 2000 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time.

### OPTICAL

<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	39° Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	90
<b>Spot diameter (mm)</b>	57
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,73






UT Downlight Trim Ø57 Non Dimmable  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4512.30A - 1664lm White
- 09.4512.14A - 1664lm Black

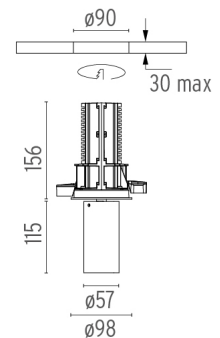

### CERTIFICATIONS

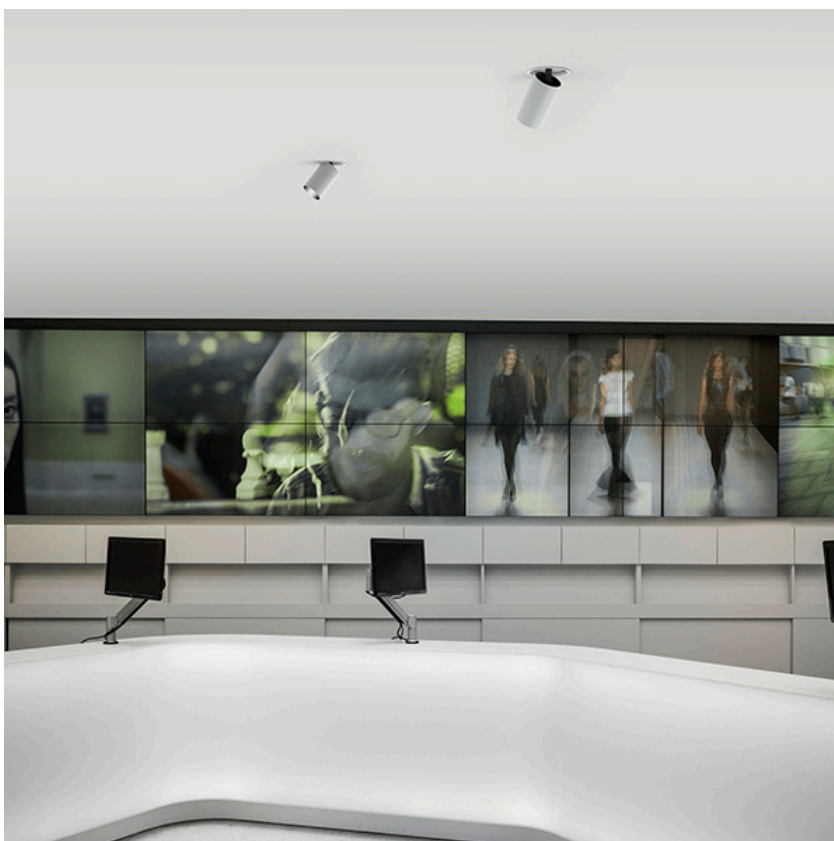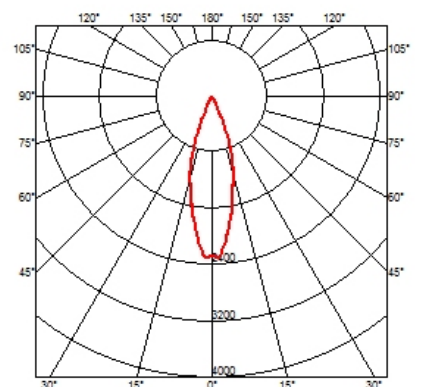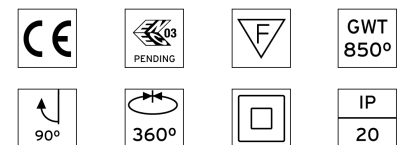

## UT Downlight Trim Ø57 Non Dimmable . Accessories

### Optical



● 08.8429.00  
**Screening Crosspiece**



○ 08.8431.00  
**Elliptical Lens**



○ 08.8432.00  
**Flood Lens**



● 08.8428.00  
**Honeycomb**




● 08.0526.00  
**Snoot Shielding Cone**





**UT Downlight Trim Ø57 Non Dimmable**  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4512.30A - 1664lm White
- 09.4512.14A - 1664lm Black



### CERTIFICATIONS

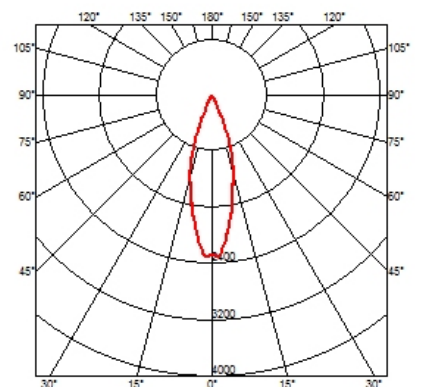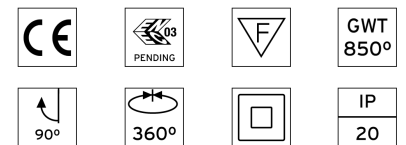

## UT Downlight Trim Ø57 Non Dimmable . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**


LED Array



**UT Downlight Trim Ø57 Non Dimmable**  
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4512.30A - 1664lm White
- 09.4512.14A - 1664lm Black



**CERTIFICATIONS**

			GWT 850°
			IP 20

