

UT DOWNLIGHT TRIM Ø57 NON DIMMABLE

| | |
|--------------------------------|--|
| Number of heads | 1 |
| Mounting | Ceiling recessed |
| Lamps description | LED Array 18W 1600 lm 4000K CRI 90 |
| Luminaire luminous flux | See reference number |
| Voltage (V) | 220/240 |
| Environment | Indoor |
| Notes | Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. |

OPTICAL

| | |
|------------------------------------|------------|
| Reflector finish | Aluminum |
| Aiming | Adjustable |
| Light distribution symmetry | Symmetric |
| Beam angle | 23° Medium |

ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer availability | Included |
| Transformer mounting | Remote |
| Transformer type | Electronic |
| Emergency | Without |
| Insulation class | Class II |

PHYSICAL


| | |
|------------------------------|-----------|
| Cutout diameter (mm) | 90 |
| Spot diameter (mm) | 57 |
| Construction material | Aluminium |
| Weight (kg) | 0,73 |





UT Downlight Trim Ø57 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4517.30A - 1189lm White
- 09.4517.14A - 1189lm Black

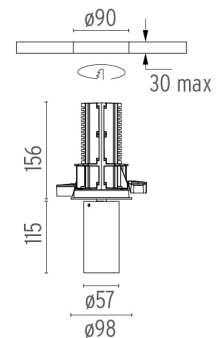

CERTIFICATIONS

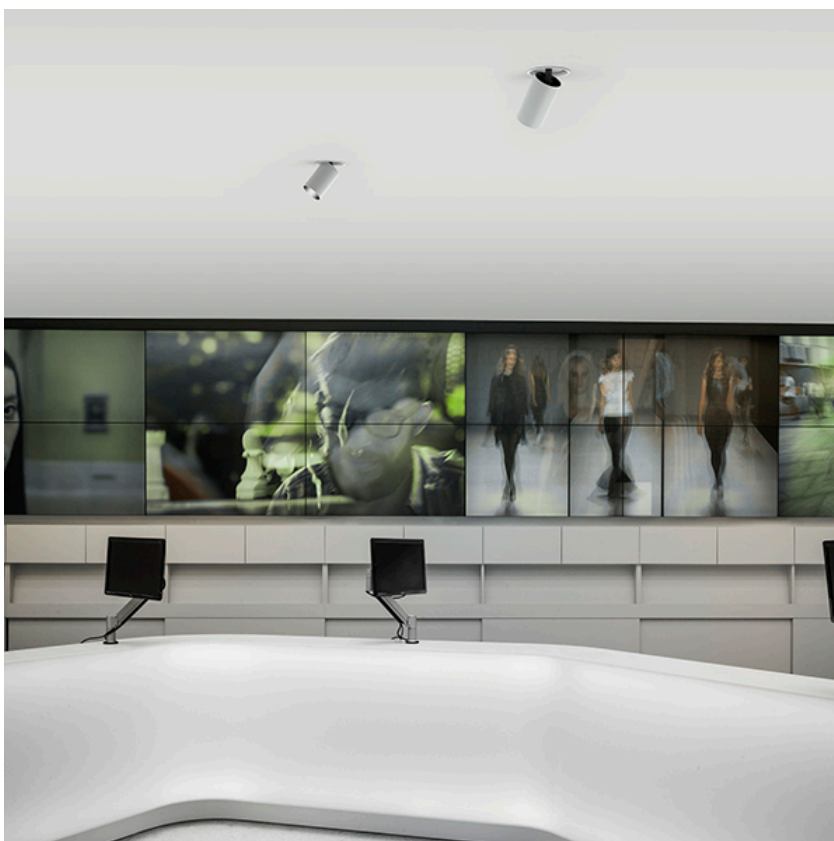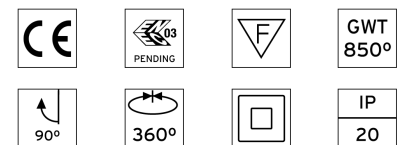

UT Downlight Trim Ø57 Non Dimmable . Accessories

Optical



● 08.8429.00

Screening Crosspiece



○ 08.8431.00

Elliptical Lens



○ 08.8432.00

Flood Lens



● 08.8428.00

Honeycomb



● 08.0526.00

Snoot Shielding Cone




UT Downlight Trim Ø57 Non Dimmable
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

○ 09.4517.30A - 1189lm White

● 09.4517.14A - 1189lm Black

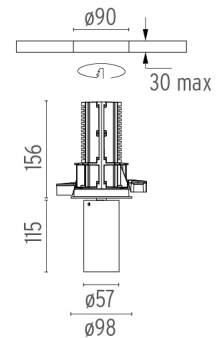

CERTIFICATIONS



UT Downlight Trim Ø57 Non Dimmable . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



UT Downlight Trim Ø57 Non Dimmable
designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

- 09.4517.30A - 1189lm White
- 09.4517.14A - 1189lm Black

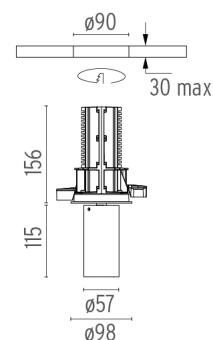

CERTIFICATIONS

