FLOS

UT DOWNLIGHT NO TRIM Ø57 NON DIMMABLE

Number of heads

Mounting Ceiling recessed

Lamps description LED Array 18W 1600 lm 4000K CRI 90

Luminaire luminous flux See reference number

Voltage (V) 220/240 Environment Indoor

Notes Screening crosspiece, lenses and Honeycomb directly installable

on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. Pre-installation frame must be ordered

separately.

OPTICAL

Reflector finish Aluminum
Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 13° Spot

ELECTRICAL

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II


PHYSICAL

Cutout diameter (mm) 100

Spot diameter (mm) 57

Construction material Aluminium

Weight (kg) 0,73

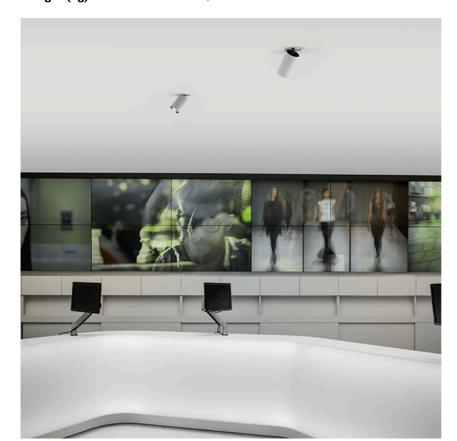




UT Downlight No Trim Ø57 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4525.30A - I341Im White 09.4525.14A - I341Im Black



CERTIFICATIONS






















UT Downlight No Trim Ø57 Non Dimmable . Accessories


Optical











08.8431.00 Elliptical Lens


08.8432.00 Flood Lens



Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>








Honeycomb

08.0526.00

Snoot Shielding Cone





CERTIFICATIONS




















Flos.architectural@flos.com www.flos.com



UT Downlight No Trim Ø57 Non Dimmable . Accessories

Mounting



08.8994.30

08.8994.14

Installation frame NO TRIM

UT Downlight No Trim Ø57 Non Dimmable . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



UT Downlight No Trim Ø57 Non Dimmable designed by FLOS Architectural

Recessed luminaire with LED light source. 220-240V, 50-60Hz remote power supply included.<nextline>

09.4525.30A - 1341Im White 09.4525.14A - 1341Im Black



CERTIFICATIONS

















