

## UT SPOT TRACK Ø86 DALI VERSION

|                                |  |
|--------------------------------|--|
| <b>Number of heads</b>         | 1  |
| <b>Mounting</b>                | Track mounting   |
| <b>Lamps description</b>       | LED Array High Performances 32,8W 3770 lm 3000K CRI 80   |
| <b>Luminaire luminous flux</b> | See reference number   |
| <b>Voltage (V)</b>             | 220/240  |
| <b>Environment</b>             | Indoor   |
| <b>Notes</b>                   | FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium. |



**UT Spot Track Ø86 Dali Version**  
designed by FLOS Architectural

Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4841.30ADA - 2528lm White
- 09.4841.14ADA - 2528lm Black

### OPTICAL


|                                    |            |
|------------------------------------|------------|
| <b>Reflector finish</b>            | Aluminum   |
| <b>Aiming</b>                      | Adjustable |
| <b>Light distribution symmetry</b> | Symmetric  |
| <b>Beam angle</b>                  | 24° Medium |

### ELECTRICAL


|                                 |                          |
|---------------------------------|--------------------------|
| <b>Transformer availability</b> | Included                 |
| <b>Transformer mounting</b>     | Integral                 |
| <b>Transformer type</b>         | Electronic dimmable dali |
| <b>Emergency</b>                | Without                  |
| <b>Insulation class</b>         | Class II                 |

### PHYSICAL

|                              |           |
|------------------------------|-----------|
| <b>Spot diameter (mm)</b>    | 86        |
| <b>Construction material</b> | Aluminium |
| <b>Weight (kg)</b>           | 1,18      |



### CERTIFICATIONS

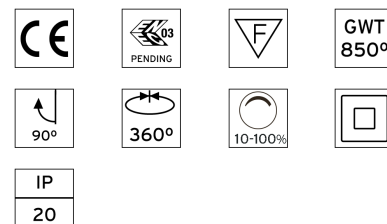

## UT Spot Track Ø86 Dali Version . Accessories

### Optical



○ 08.8163.68

#### Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

#### Flood lens

Flood lens made in press glass.



● 08.8495.14

#### Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

#### Holding ring

Holding ring



● 08.8411.00

#### Screening crosspiece




### UT Spot Track Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

● 09.4841.30ADA - 2528lm White

● 09.4841.14ADA - 2528lm Black



### CERTIFICATIONS



## UT Spot Track Ø86 Dali Version . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**

LED Array




**UT Spot Track Ø86 Dali Version**  
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.  
220-240V, 50-60Hz power supply integrated.

● 09.4841.30ADA - 2528lm White

● 09.4841.14ADA - 2528lm Black



**CERTIFICATIONS**

